



Ordering Code: **RD-3A-X-Y-Z**

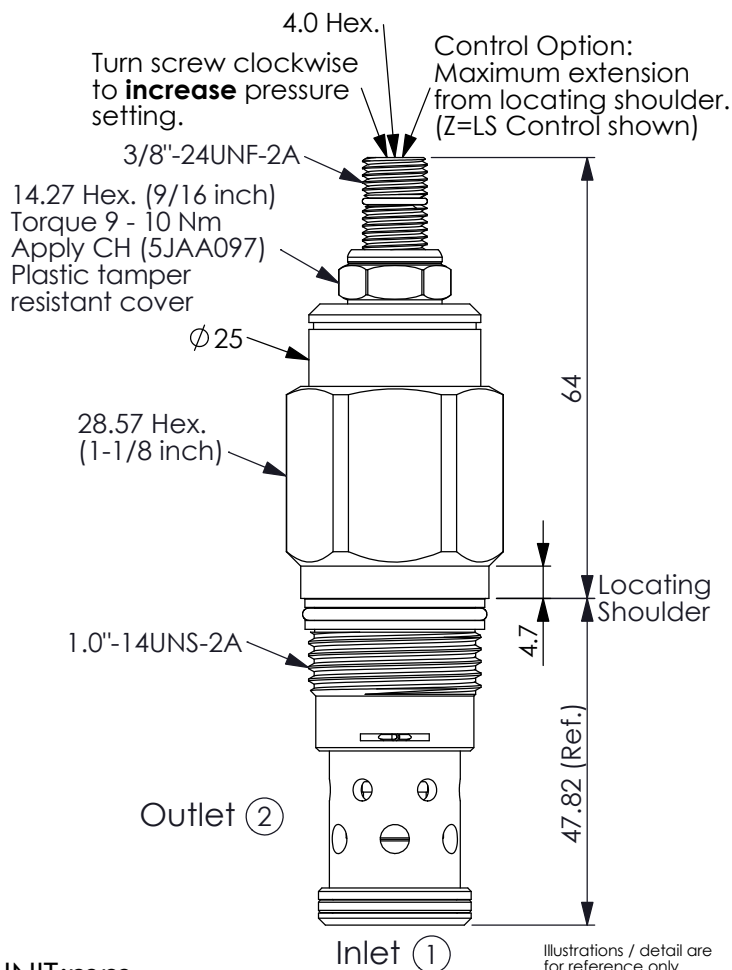

TECHNICAL DATA

Max. Operating pressure: 350 bar


Rated flow: 200 l/min

Cavity-Tooling: 3A-2

Installation torque: 60 - 70 Nm

Weight Approximately: 0.30 (Z=LS) kg

If Port ② would be rated for full pressure and suitable for cross-relief circuit application, the installation of double back-up rings is mandatory. **Please consult the Winner sales department for technical support.**

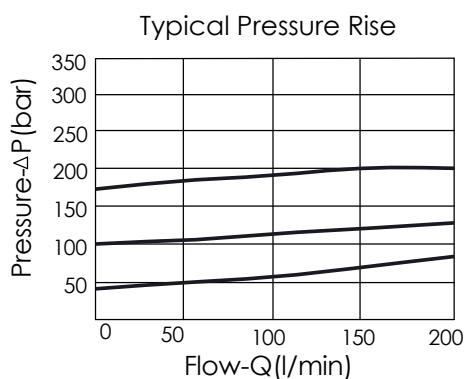

X OPERATION

25 Direct Acting
① to ② (P to T)

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)
- Dirt tolerant

Y PRESSURE SETTING

A	35 - 210 bar (70 bar Standard Setting)
B	20 - 105 bar (70 bar Standard Setting)
C	70 - 420 bar (70 bar Standard Setting)
D	14 - 55 bar (28 bar Standard Setting)
E	7 - 28 bar (14 bar Standard Setting)
S	3.5 - 14 bar (7 bar Standard Setting)
W	55 - 315 bar (70 bar Standard Setting)

Z OPTION

LS Leakproof hex. socket screw. With stainless steel all metal components

