



方向閥(四口三位,先導切換)

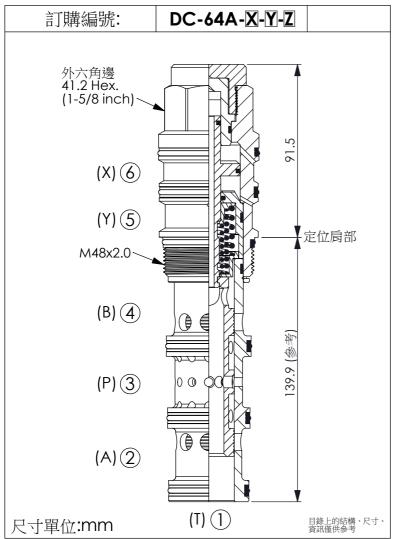



	技術參數	
額定壓力:	350	bar
額定流量:	200 - 760 (參考性能曲線圖)	I/min
成型孔:	64A-6	
安裝扭矩:	465 - 500	Nm
重量:	1.823	kg

- ·切換閥所需最小先導壓力: 9 bar. ·最大內漏量約 (30 cc/min./70 bar)
- · 所有孔位都可以耐壓 350 bar.

性能曲線圖	
40	壓差與流量 (Y=26)
40	
(30 Jac	ロ コ 3 到口 口 3 到口 口 3 到口 4 し 3 対 日 3 対 日 3 十二 3 十二 1 4 1 5 1 5 1 5 1 5 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1<
= 20 - 20 (bar)	
器 10 − 発	口②到口①
0	100 200 300 400 500
	流量-Q(l/min)

X	結構設計選項	
6E	先導切換 先導壓口(口⑤和口⑥)	

Y	中立位置選項	
26	四口三位, 中立位置"口③與口①相通"	

Z	控制方式選項		
N	不可調		