



DIRECTIONAL VALVE (4-Way, 3-Position Spool, Pilot-to-shift)

Ordering Code: **DC-62A-X-Y-Z**

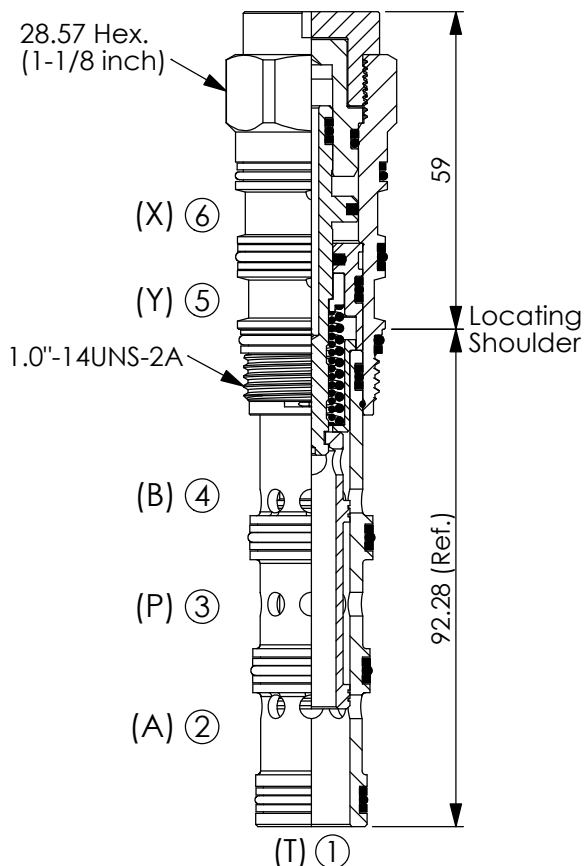

UNIT:mm

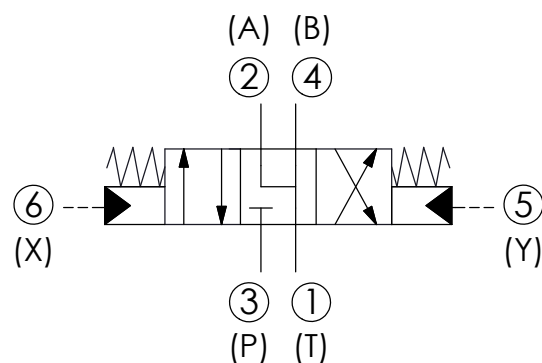

TECHNICAL DATA

Max. Operating pressure: 350 bar

Rated flow: 38 - 120 l/min
(Refer To Performance Chart)


Cavity-Tooling: 62A-6

Installation torque: 60 - 70 Nm

Weight: 0.361 kg

- Minimum Pilot Pressure Required to Shift Valve : 10.5 bar.
- Maximum Leakage Approximately (30 cc/min./70 bar)
- All ports will accept 350 bar.

Performance Chart

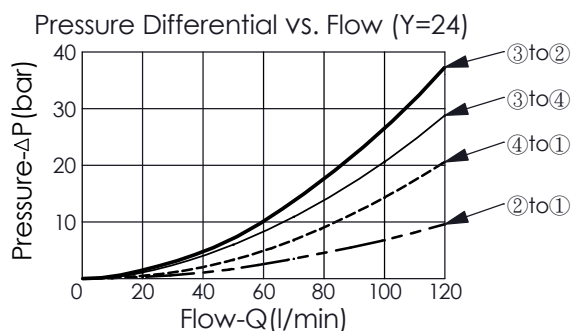

X OPERATION

6E Pilot-to-shift

Y SPOOL CONFIGURATION

24 Spool 4-Way, 3-Position,
A and B to T Centre

Z OPTIONS

N Non-adjustable