

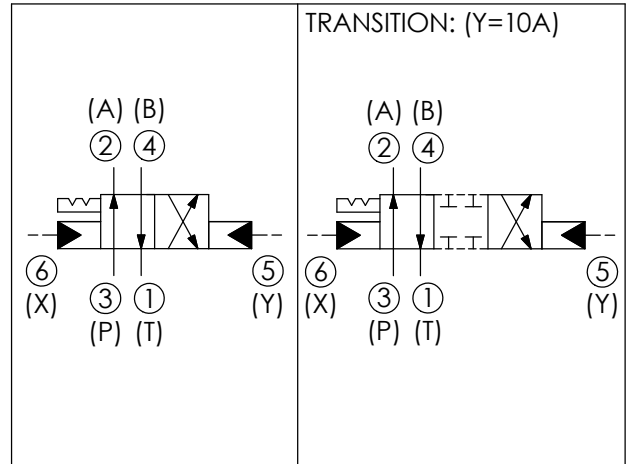


DIRECTIONAL VALVE (4-Way, 2-Position Spool, Pilot-to-shift, Detented)

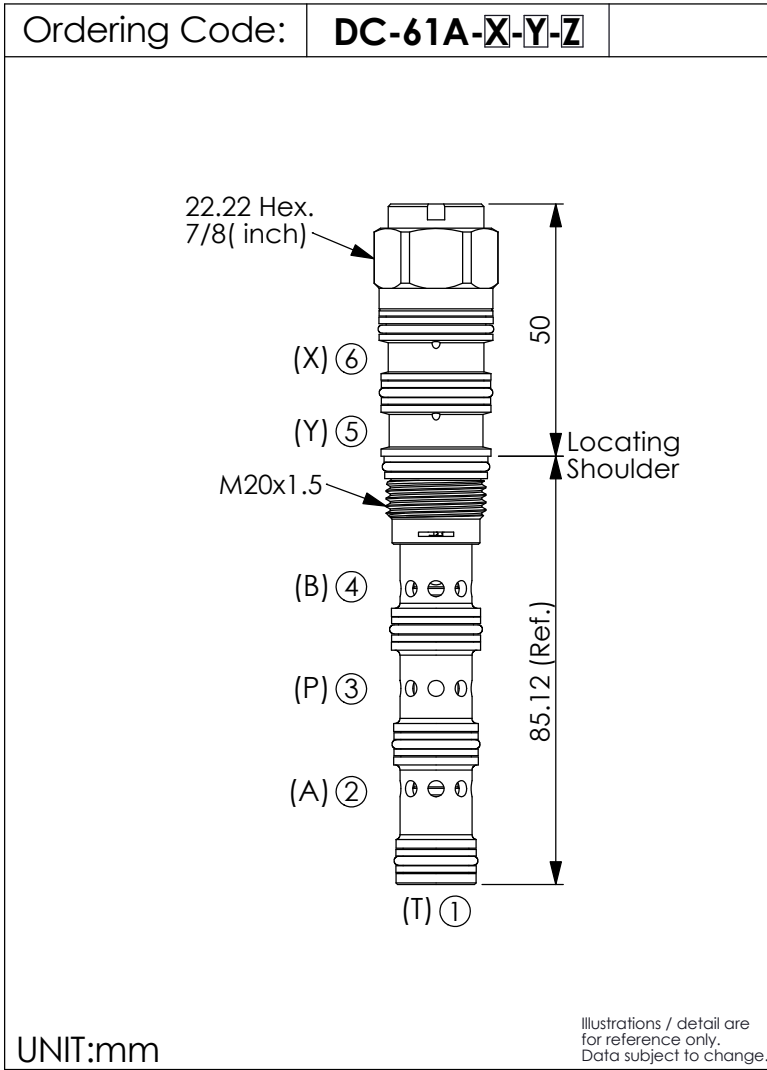

TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	40 - 50	l/min (Refer To Performance Chart)
Cavity-Tooling:	61A-6	
Installation torque:	40 - 50	Nm
Weight:	0.202	kg
<ul style="list-style-type: none"> Minimum Pilot Pressure Required to Shift Valve : 12 bar. Maximum Leakage Approximately (30 cc/min./70 bar) All ports will accept 350 bar. 		

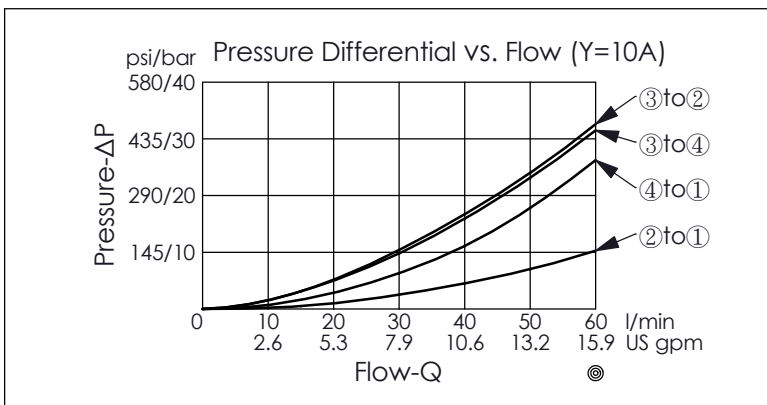

X	OPERATION	
6D	Pilot-to-shift, Detented	

Y	SPOOL CONFIGURATION	
10A	Spool 4-Way, 2-Position, Port ③ to Port ②, Port ④ to Port ①, 4 Ports Blocked At Transition Position, After Transition, Port ③ to Port ④, Port ② to Port ①	

Z	OPTIONS	
N	Non-adjustable	