



DIRECTIONAL VALVE (3-Way, 2-Position, Pilot Operated, With Internal Drain To Port ③)

Ordering Code: **DP-11A-X-Y-Z**

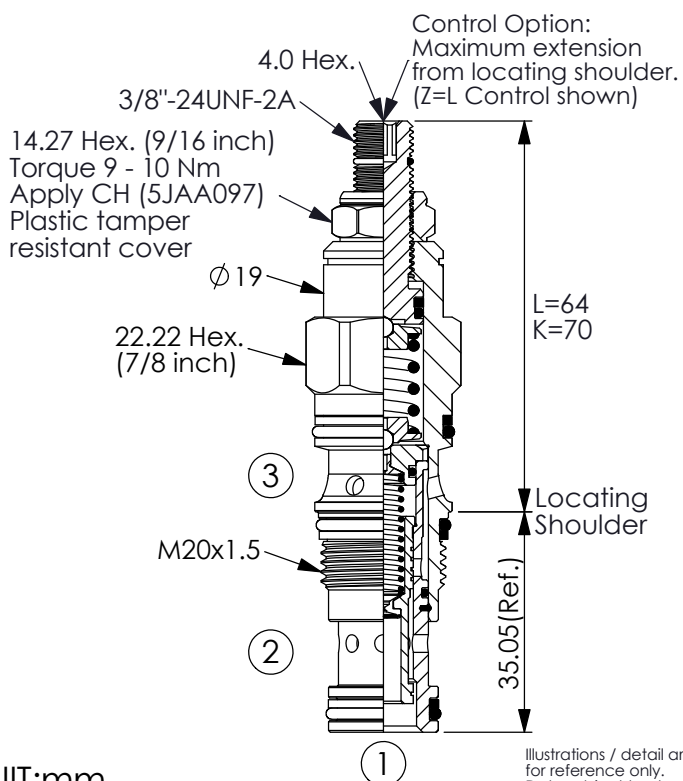


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	28	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40 - 50	Nm
Weight:	0.144 (Z=L)	kg

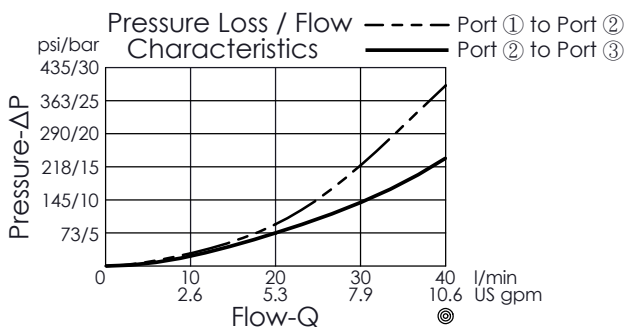

X OPERATION

3P

Port ① to Port ②;
Port ① pilot to shift,
Port ② to Port ③

· Maximum Leakage Approximately (15 cc/min./70 bar)

Z OPTIONS


L

Leakproof hex. socket screw.



K

Handknob with Lock Knob.
(Order Code: 6ZAK001)



C

Stainless Steel Tamper Resistant Cover.



Y

SPRINGS

ADJUSTMENT RANGES

A

7 - 210 bar (70 bar Standard Setting)

B

3.5 - 105 bar (70 bar Standard Setting)

D

1.7 - 55 bar (28 bar Standard Setting)

E

1.7 - 28 bar (14 bar Standard Setting)

K

5 - 105 bar (70 bar Standard Setting)

W

10.5 - 315 bar (70 bar Standard Setting)