



Ordering Code: **FD-16W-X-Y-Z**

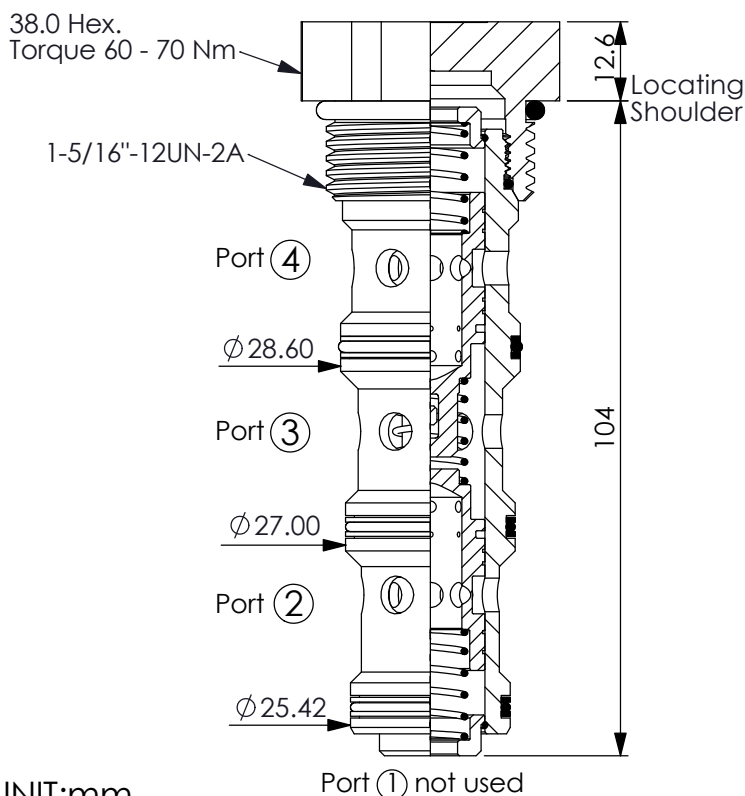

UNIT:mm


- (1)The FD16W-42 will divide inlet flow from port ③ to port ② and port ④ , based on the ratio specified,regardless of operating pressure.
- (2)The valve will combin inlet flow from both port ② and port ④ to port ③ .
- (3)The FD16W-42 will keep a flow to both combining port ② and port ④ when port ② or port ④ is "free-wheeling." This function keeps parallel hydraulic-motor drive circuits from stalling in the combining mode.

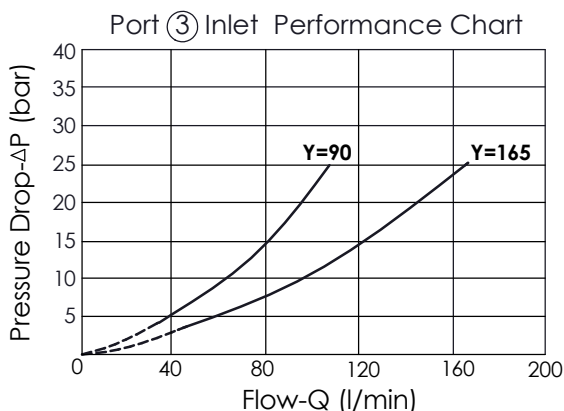

Y	NOMINAL CAPACITY		
90	30 - 90 LPM	Ratio 50:50	
165	50 - 165 LPM	Ratio 50:50	

• Other ratio options available;consult factory

**\*Note: Please make sure the flow dividing and combining at port ③ are in the flow range. If the flow exceed the maximum range, risk may be able to damage valve, and leads abnormally flow dividing and combining. If the flow is lower than the minimum range, the accuracy will reduce substantially.**

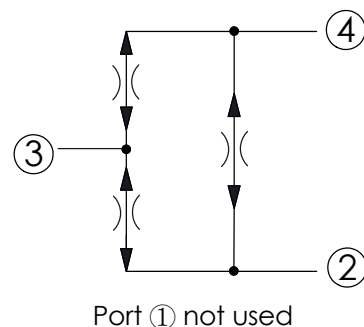

### TECHNICAL DATA

Pressure min-max:	10 - 350 bar
Rated Inlet Flow:	165 l/min
Cavity-Tooling:	16W-4
Installation torque:	60 - 70 Nm
Weight:	0.38 kg

Flow Accuracy: 10% from 40-100% of Max.Inlet flow

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level:  
Please refer WINNER technical information.  
( T.101.101.E HYDRAULIC FLUID (A) VISCOSITY )  
( T.101.102.E HYDRAULIC FLUID (B) CLEANLINESS )  
( T.101.103.E HYDRAULIC FLUID (C) TEMPERATURE )

Mounting Position: unrestricted

X	OPERATION	
42	4 Ports; Flow Divider/Combiner (Anti-Stall Features)	

Z	OPTION	
N	Non-adjustable	