



FLOW CONTROL VALVE (Fine Low-Torque Adjustment, Pressure Compensated)

Ordering Code: **FR-16W-X-Y-Z**

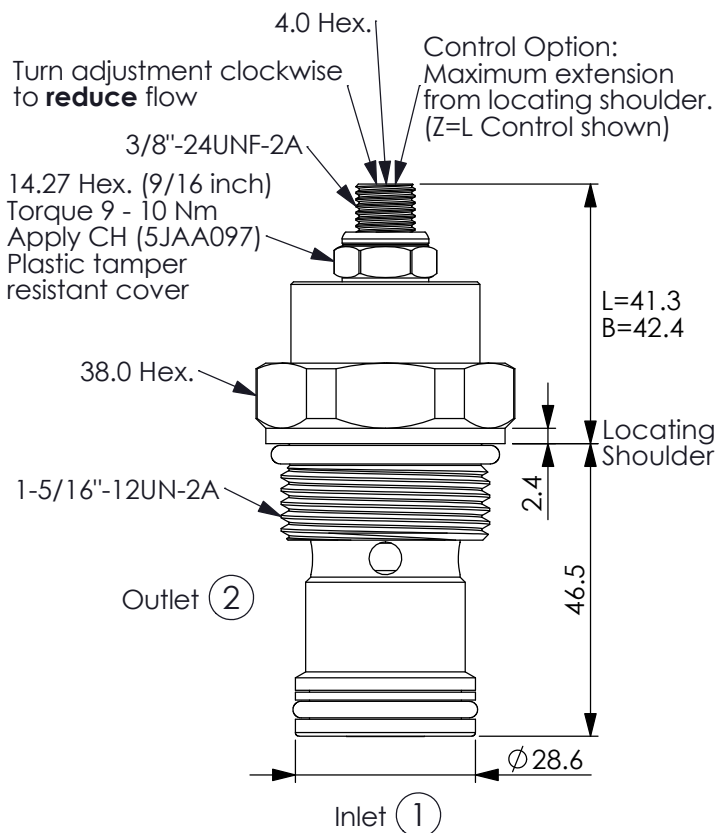


UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.



TECHNICAL DATA

Max. Operating Pressure:	240	bar
Rated flow:	95	l/min
Cavity-Tooling:	16W-2	
Installation torque:	60 - 70	Nm
Weight:	0.383 (Z=B)	kg

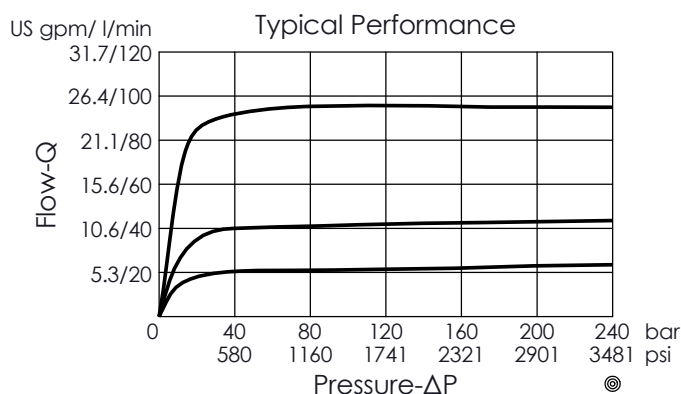

Y

FLOW SETTING

N

Standard, 95 LPM fully adjustable

• The factory standard flow setting can be specified by the customer. For example, for a setting of 60 LPM \pm 10%, the ordering code would be FR-16W-29-N-[Z]-0600. Please contact the Winner sales department for further details.

X

OPERATION

29

port ① to port ②
pressure compensated ;
port ② to port ①
fixed orifice

Z

OPTIONS

L

Leakproof hex.
socket screw.



B

Handknob and
aluminum locknut.

