

PRIORITY FLOW CONTROL VALVE
(Bypass/Pressure compensated)

Ordering Code:	**FR-2A-X-Y-Z**	

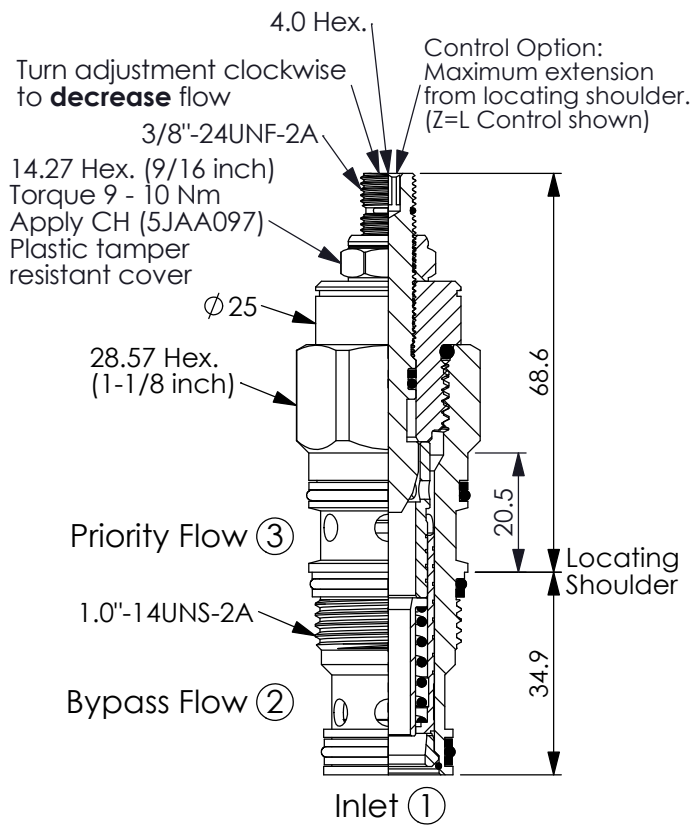

UNIT:mm


Illustrations / detail are for reference only. Data subject to change.

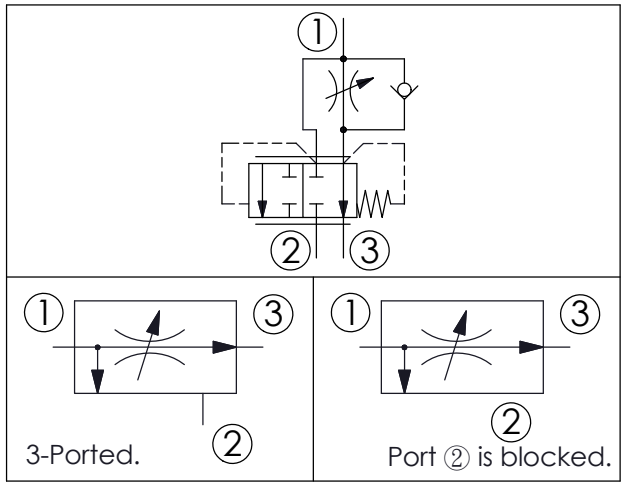


TECHNICAL DATA

Max. pressure:	350	bar
Inlet flow at port ①:	60 LPM nominal 90 LPM max.	
Priority Flow Ranges:	1 - 60	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60 - 70	Nm
Weight:	0.287	kg

Note: It can be used as a priority-type flow regulator or a restrictive-type 2-way flow regulator when the bypass port (port ②) is blocked.

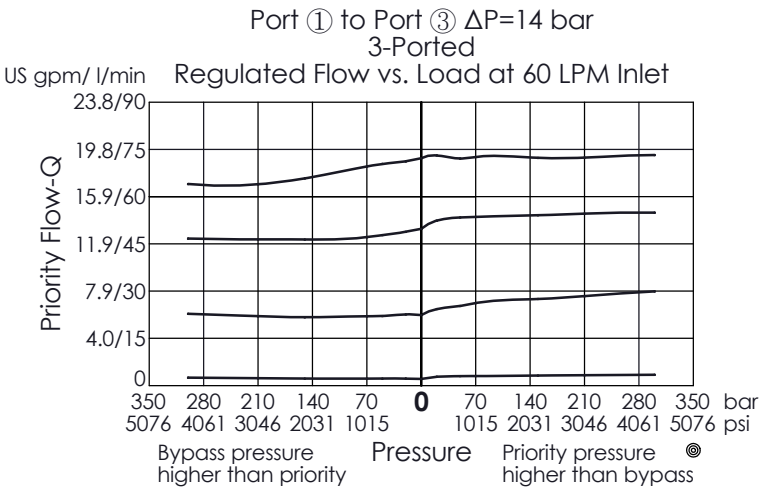

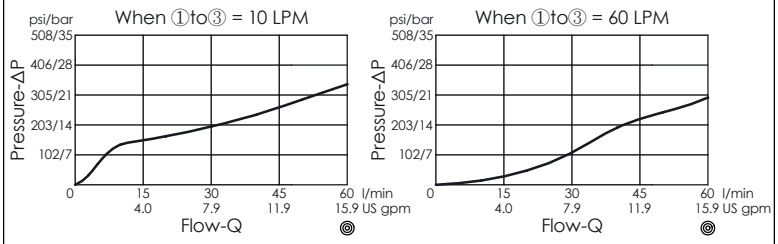

③to① Pressure Drop

X	OPERATION	
3A	3 Port, Reverse Flow, Bypass/Restrictive	

Y	PRIORITY FLOW	
	ADJUSTMENT RANGES	
0600	1 - 60 LPM	

Z	OPTIONS	
L	Leakproof hex. socket screw. 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 	
T	Three-winged Handknob Kit. 	