


FLOW CONTROL VALVE (Fully Adjustable Needle with Low Noise and Sharp-Edge Orifice)

Ordering Code: **NV-10W-X-Y-Z**

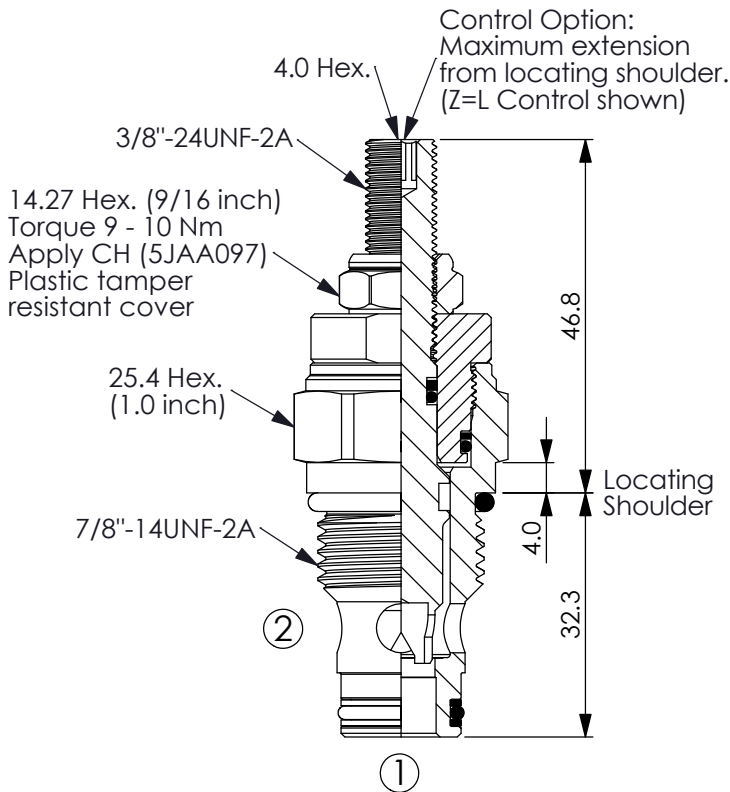


UNIT:mm


Illustrations / detail are for reference only. Data subject to change.

Performance Chart

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

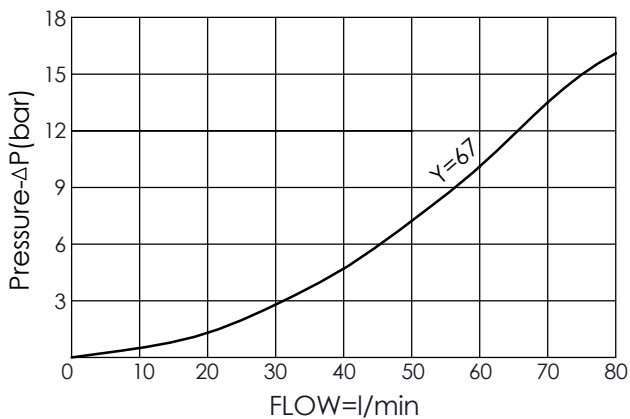

Y	MAXIMUM NOMINAL ORIFICE	
67	ϕ 6.7 mm	



TECHNICAL DATA

Max. operating pressure:	350 bar	(Refer To Performance Chart)
Rated Flow:	50 l/min	(Refer To Performance Chart)
Cavity-Tooling:	10W-2	
Installation torque:	35 - 45 Nm	
Weight:	0.15 (Z=L) kg	

X OPERATION

20 Fully Adjustable Needle with Sharp-Edge Orifice

Z OPTIONS

L	Leakproof hex. socket screw.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)		
E	Handknob and locknut.		
B	Handknob and aluminum locknut.		
T	Three-winged Handknob Kit.		