



## FLOW CONTROL VALVE (Fully Adjustable Needle with Sharp-Edge Orifice)


Ordering Code: **NV-18A-X-Y-Z**

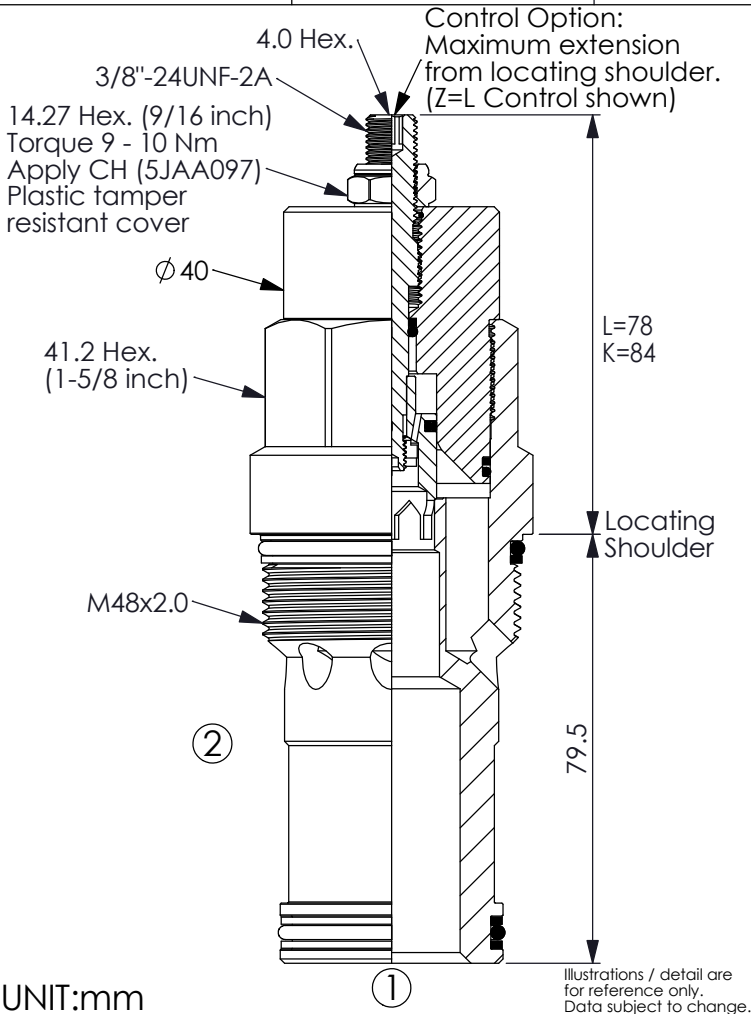

### TECHNICAL DATA

Max. pressure:	350 bar
(Refer To Performance Chart)	
Rated Flow:	240 l/min
(Refer To Performance Chart)	
Cavity-Tooling:	18A-2 (18AB-2)
Installation torque:	465 - 500 Nm
Weight:	1.14 (Z=L) kg

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

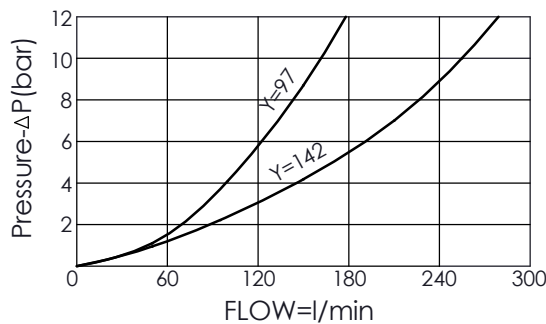

### Y MAXIMUM NOMINAL ORIFICE DIAMETER

142	Ø 14.2 mm
97	Ø 9.7 mm

### X OPERATION

20	Fully Adjustable Needle with Sharp-Edge Orifice
----	---

### Z OPTIONS

L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
T	Three-winged Handknob Kit.	