



## FLOW CONTROL VALVE (Electro-Proportional Flow Control Valve, Normally Closed Throttle)

Ordering Code: **PFC-10W-X-Y-Z**

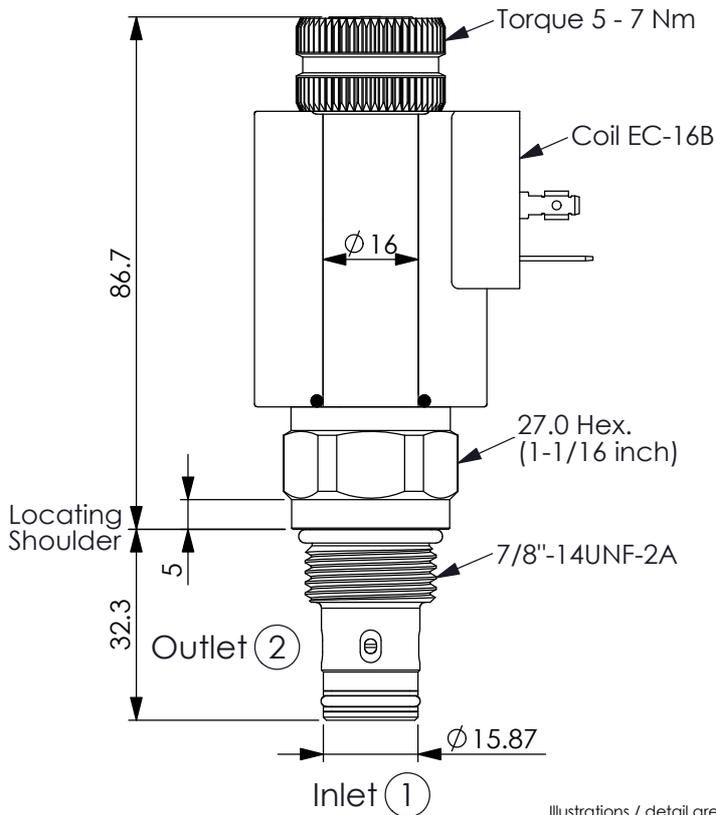

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



### TECHNICAL DATA

Max. Operating pressure: 260 bar  
(If you need higher max. operating pressure, please contact the Winner sales department)

Rated flow: 40 l/min

Cavity-Tooling: 10W-2

Installation torque: 35 - 45 Nm

Linearity (with dither) <2%

Repeatability (with dither) <2%




Hysteresis (with dither) <4%

Hysteresis with DC input <8%

Deadband, nominal (as a percentage of input) 25%

Weight: (with Coil) 0.474 kg  
(without Coil) 0.234 kg

Coils must be ordered separately

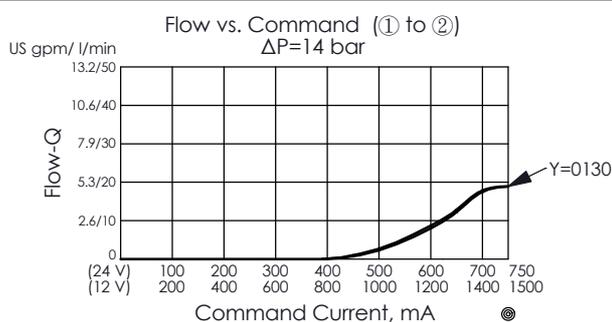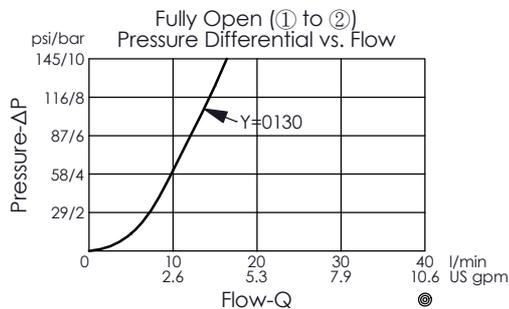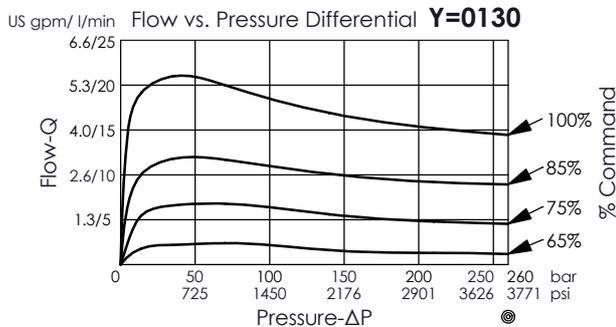

### X OPERATION

2C 2 Ports · 26 Watt. Coil  
 $\phi 16$  mm tube


### Y FLOW

NOMINAL CAPACITY

0130 13 LPM

### Z OPTIONS

N Non-adjustable



P Push Style Manual Override

