



Ordering Code: **CV-382A-X-Y-Z**

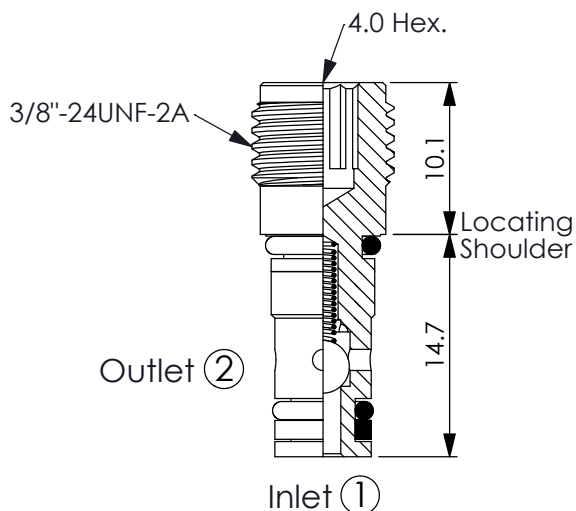


UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.



TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	4	l/min
Cavity-Tooling:	382A-3	
Installation torque:	11 - 14	Nm
Weight:	0.007	kg

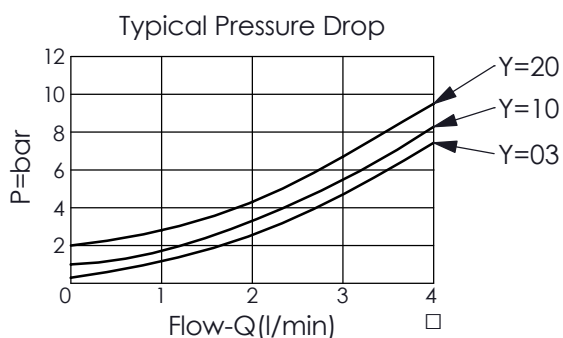

X

OPERATION

20

① to ② (Free Flow)

Y

SPRINGS

Cracking pressure

03

0.3 bar

10

1.0 bar

20

2.0 bar

Z

OPTION

NS

Non-adjustable
With stainless steel
all metal components
(Buna-N Seal)