



Ordering Code: **FR-13A-X-Y-Z**

Turn adjustment clockwise to **decrease** flow

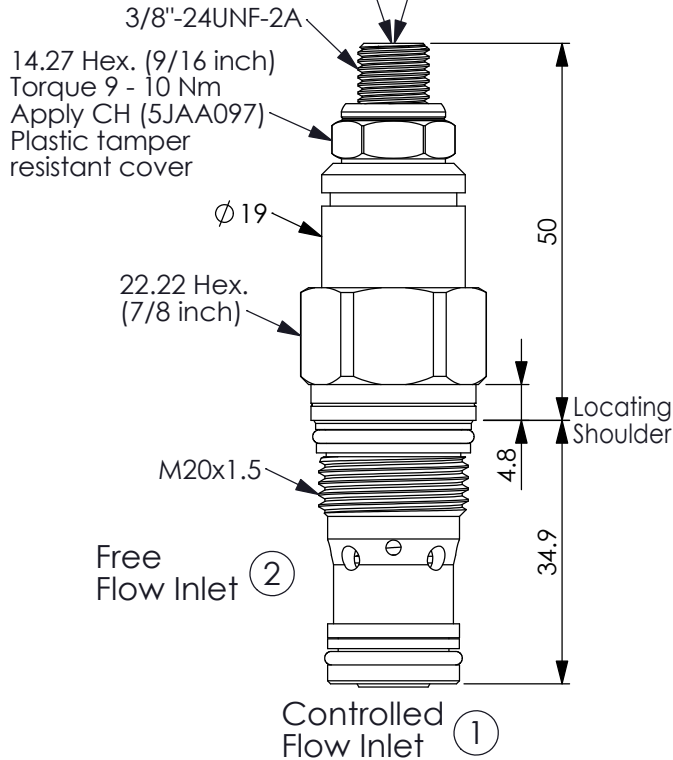

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

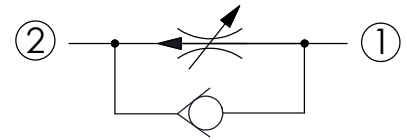

TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	23 l/min
Cavity-Tooling:	13A-2
Installation torque:	40 - 50 Nm
Weight:	0.139 kg
Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.	

X OPERATION

20 Standard Type

Y FLOW SETTING

A	0.4 - 23 LPM
B	0.4 - 8 LPM
C	0.4 - 4 LPM
E	0.4 - 15 LPM

Z OPTIONS

LS	Leakproof hex. socket screw. With stainless steel all metal components
-----------	--

