


Illustrations / detail are
for reference only.
Data subject to change.



Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.

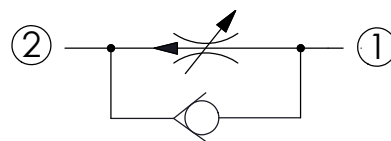