


FLOW CONTROL VALVE

(Stainless Steel All Metal Components)


(Fixed Orifice, Pressure Compensated)

Ordering Code: **FR-13A-X-Y-Z**

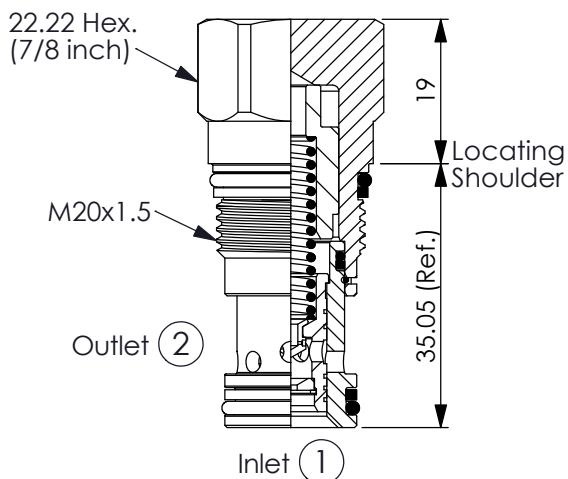


UNIT:mm

Illustrations / detail are for reference only.
Data subject to change.



TECHNICAL DATA

Pressure min-max:	10 - 350	bar
Rated flow:	0.4 - 23	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40 - 50	Nm
Weight:	0.11	kg

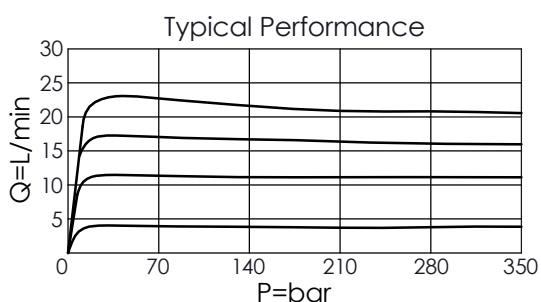

X OPERATION

2F Fixed Setting

· If a momentary impact pressure is needed in the application, please consult our sales department.

Y FLOW SETTING

0040	0.4 LPM	
0050	0.5 LPM	
0600	6.0 LPM	
0680	6.8 LPM	
0750	7.5 LPM	
1000	10.0 LPM	
1400	14.0 LPM	
1500	15.0 LPM	

· Factory set flow ratings are within $\pm 10\%$ of the requested setting
· Customer must specify a flow rating
· If you need specific flow accuracy, please contact WINNER's sales department

Z OPTIONS

NS Non-adjustable
With stainless steel
all metal components

