


FLOW CONTROL VALVE

(Stainless Steel All Metal Components)


(Fully Adjustable Needle Valve, High Capacity)

Ordering Code: **NV-5A-X-Y-Z**

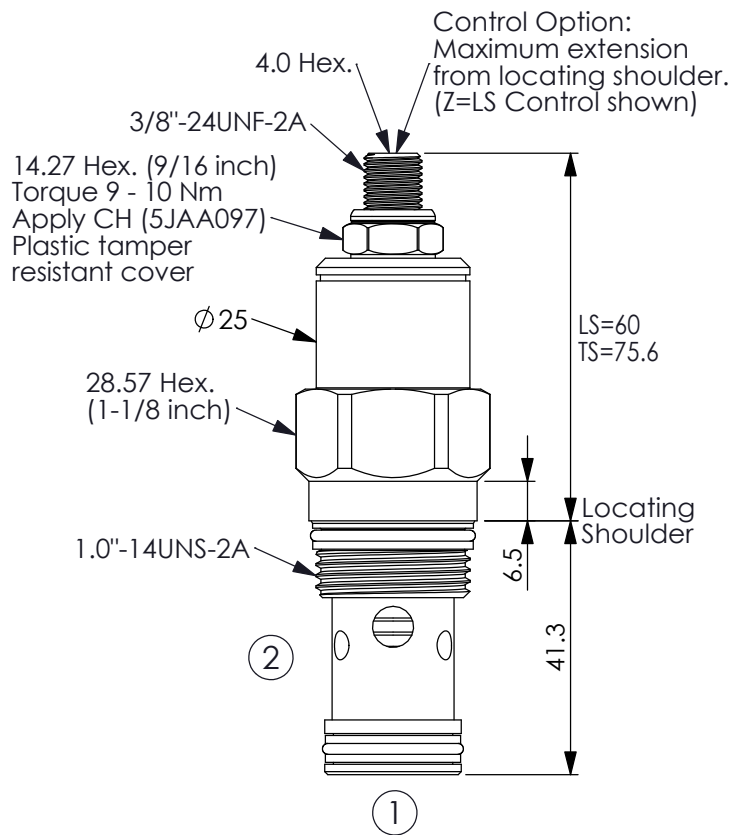

UNIT:mm

Illustrations / detail are
for reference only.
Data subject to change.



TECHNICAL DATA

Max. operating pressure: 350 bar
(Refer To Performance Chart)


Rated flow: 170 l/min
(Refer To Performance Chart)

Cavity-Tooling: 5A-2

Installation torque: 60 - 70 Nm

Weight Approximately: 0.32 (Z=TS) kg

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

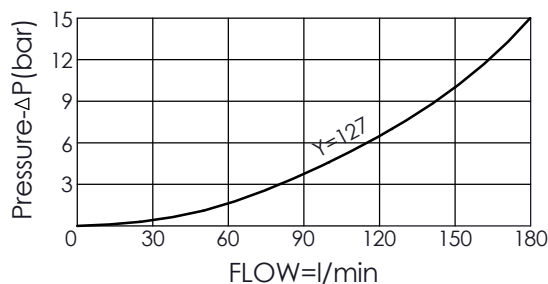

Y MAXIMUM NOMINAL ORIFICE DIAMETER


127 Ø 12.7 mm

X OPERATION

28 Fully Adjustable
Needle Valve

Z OPTIONS

LS Leakproof hex.
socket screw.
With stainless steel
all metal components



TS Plastic Three-winged
Handknob
Aluminum Locknut
With stainless steel
all metal components

