

# SOLENOID OPERATED VALVE

## Continuous Duty Coils-ED 100%

Ordering Code: **EC-04W-X-Y-Z-D155**


Dimensions: 48, 21.5, 3, 36, 38.5, 36.3±0.1, Ø26, Ø12.7

Labels: PVC COVER, AMP SUPERSEAL MALE HOUSING

WIRE Length **155 mm**  
 (\* Wire length can be specified upon request. Please contact the Winner sales department for details.)

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

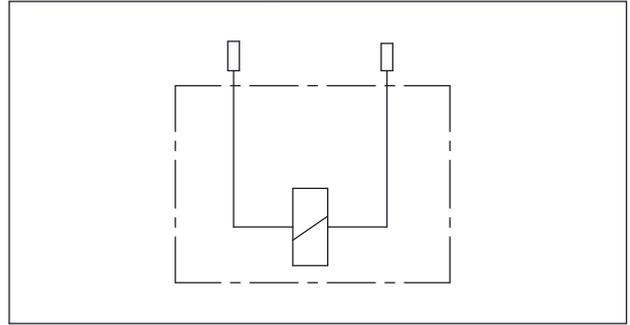

TECHNICAL DATA	
Weight:	0.22 kg
HEAT INSULATION CLASS H:	
356°F	(180°C)
Ambient temperature range:	
-22+140°F	(-30+60°C)
Available on request: Different Voltages - Different connectors.	
Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.	
Winner Coil Using Notice: Please refer Winner technical information. ( T.101.105.E Winner Coil Using Notice )	
<b>CE</b> approved, <b>UKCA</b> approved	

X	Power (W)	
<b>200</b>	20 Watt.	

Y	Connections	
<b>C</b>	DOUBLE LEAD (L)	

Z	Voltage (V)	Resistance (Ω)	Current (A)	
	Nominal	20~25 °C	Cold Coil	Hot Coil
<b>E</b>	12V DC	7.5±7%	1.66	1.06
<b>D</b>	24V DC	28.6±7%	0.88	0.53
<b>J</b>	28V DC	39.2±7%	0.71	0.50