

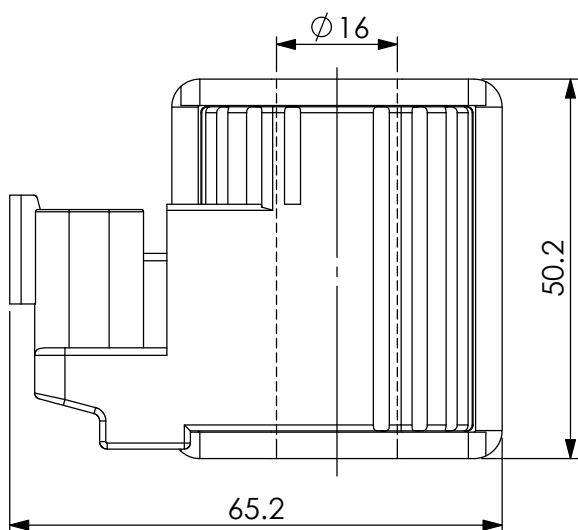
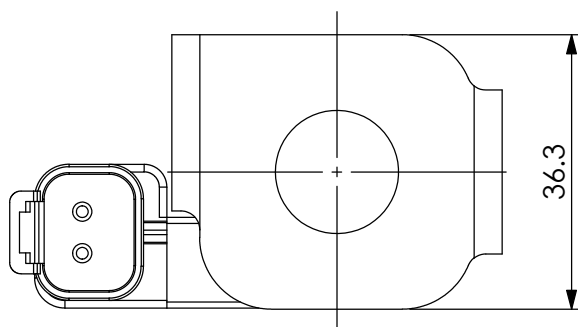


Ordering Code: **EC-16G-X-Y-Z**



UNIT:mm



TECHNICAL DATA

Weight: 0.31 kg

HEAT INSULATION CLASS H:
356°F (180°C)

Ambient temperature range:
-22+140°F (-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed $\pm 10\%$ of nominal voltage to obtain correct operation and long life of coils.

Winner Coil Using Notice:
Please refer Winner technical information.
(T.101.105.E Winner Coil Using Notice)

CE approved, **UKCA** approved

X	Power (W)
280	28 Watt.

Y	Connections
F	DEUTSCH DT04-2P (V)

Z	Voltage (V)	Resistance (Ω)	Current (A)	
	Nominal	20~25 °C	Cold Coil	Hot Coil
E	12V DC	5.14 \pm 10%	2.25	1.49
D	24V DC	20.6 \pm 10%	1.15	0.76
G	26V DC	24.14 \pm 10%	1.05	0.70