




ISO 03 SANDWICH MANIFOLD




Ordering Code: MH03DAT-X-Y-Z 01 Stack Height: 44.5mm

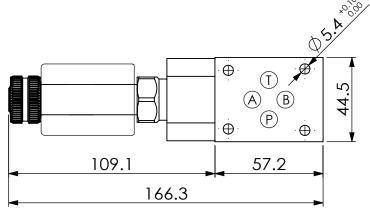

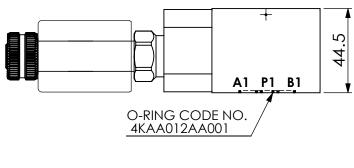

UNIT:mm

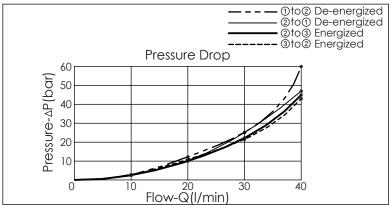

Y	SELECTION FOR B PORT CONTROL	
N	WITHOUT PORT	
Pov 240923		

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 30 I/min

Cartridge Valve:

Refer to EP11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.58 kg(INCLUDE VALVE ,WITHOUT COIL)

* If you need the special specification. Please contact us.

X	SELECTION FOR A PORT CONTROL (REFER TO EP11A-汉-Y-辽)	
11A3	CAVITY ONLY (WITHOUT VALVE)	
EP53N04	EP11A3C53N04,30LPM,350bar(WITHOUT COIL)	
EP53T04 EP11A3C53T04, 30LPM,350bar(WITH PUSH A TWIST STYLE MANUAL OVERRIDE,WITHOUT C		

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-16B-X-Y-Z)

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
If there are requirements for other materials or surface		

treatments, please contact the Winner sales department.

M.DAT.301 Rev.240923