



ISO 03 SANDWICH MANIFOLD

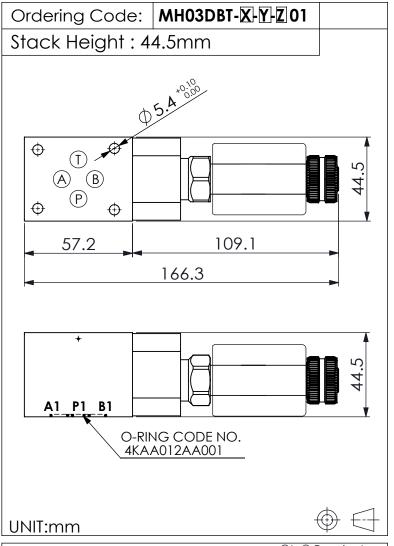



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 30 1/min

Cartridge Valve:

Refer to EP11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

ı				
	Aluminum	0.35 kg(WITHOUT VALVE) 0.59 kg(INCLUDE VALVE ,WITHOUT COIL)		

* If you need the special specification. Please contact us.

(0)	
Pressure-△P (bar) 0	
Pressor	10 20 30 40
	Flow-Q(I/min)

X	SELECTION FOR A PORT CONTROL	
N	WITHOUT PORT	

Y	Y SELECTION FOR B PORT CONTROL (REFER TO EP11A-X-Y-Z)	
11A3	I1A3 CAVITY ONLY (WITHOUT VALVE)	
EP54N04	EP11A3C54N04,30LPM,350bar(WITHOUT COII	
EP54M04	EP11A3C54M04 , 30LPM,350bar (WITH SCREW-OUT KNOB STYLE ,WITHOUT COIL)	
COIL MUST BE ORDERED SEPARATELY		

(REFER TO EC-16B-X-Y-Z)

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

If there are requirements for other materials or surface treatments, please contact the Winner sales department.

M.DBT.302

Rev.240923