

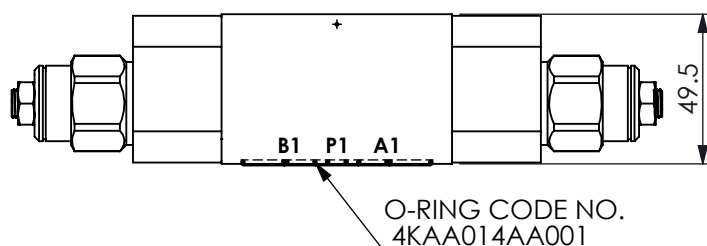


Ordering Code: **MH05CDW-X-Y-Z 11**

Stack Height : 49.5mm

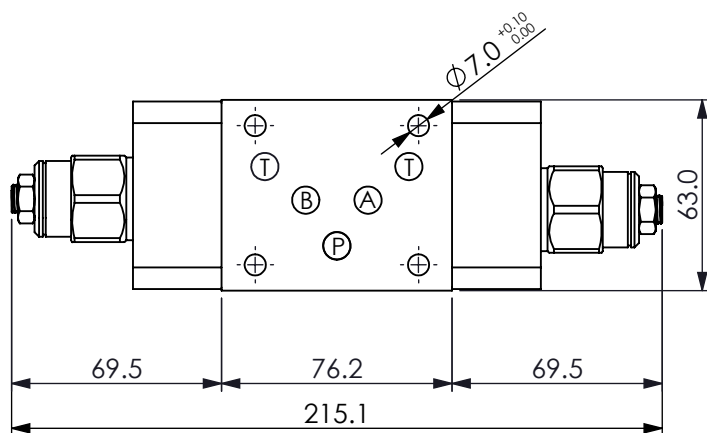

UNIT:mm

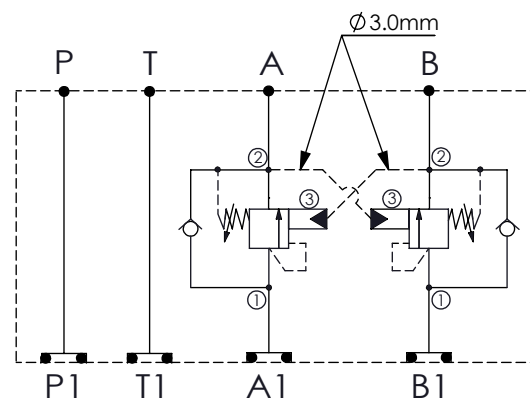

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 80 l/min


Cartridge Valve:

Refer to CB2A-X-Y-Z

* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.87 kg(WITHOUT VALVES) 1.67 kg(INCLUDE VALVES)
Ductile Iron	2.54 kg(WITHOUT VALVES) 3.34 kg(INCLUDE VALVES)

* If you need the special specification.
Please contact us.

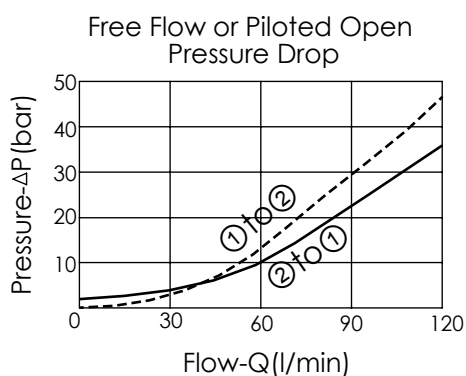

X SELECTION FOR A PORT CONTROL

2A3	CAVITY ONLY(WITHOUT VALVE)
CB3H	CB2A33HL (3:1 , 280bar)
CB4J	CB2A34JL (4.5:1 , 350bar)
CB0J	CB2A30JL (10:1 , 350bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR B PORT CONTROL

2A3	CAVITY ONLY(WITHOUT VALVE)
CB3H	CB2A33HL (3:1 , 280bar)
CB4J	CB2A34JL (4.5:1 , 350bar)
CB0J	CB2A30JL (10:1 , 350bar)

Please refer to the list price of cartridge program.

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON(Phosphatizing)
E	DUCTILE IRON(Zinc-Nickel plating)