
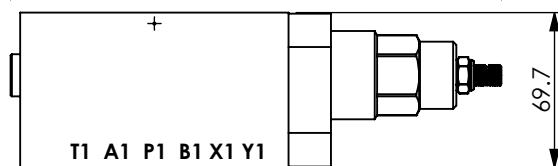



ISO 07 SANDWICH MANIFOLD

Ordering Code: **MH07PPW-X-Y-Z 01**

Stack Height : 69.7mm

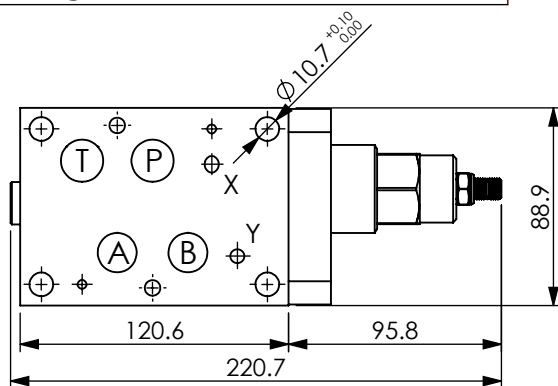



LOCATING PIN

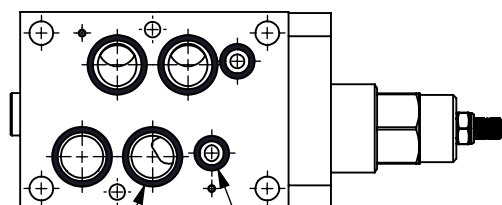

O-RING CODE NO.
4KAA118AA001

O-RING CODE NO.
4KAA111AA001

UNIT:mm

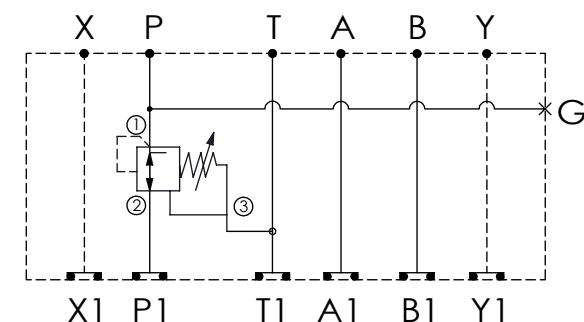

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 120 l/min

Cartridge Valve:
Refer to PD17A-X-Y-Z
* Refer to Winner Cartridge Valve Catalog.

Aluminum	1.74 kg(WITHOUT VALVE)
	2.44 kg(INCLUDE VALVE)

* If you need the special specification.
Please contact us.

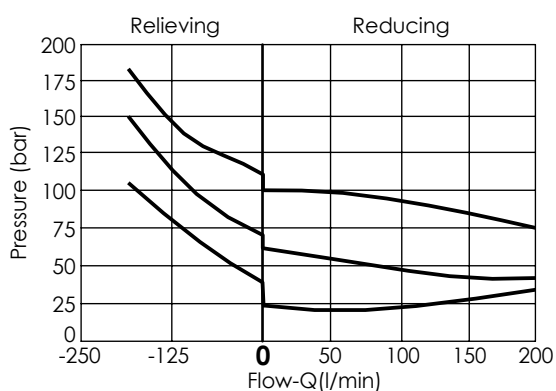

X

SELECTION FOR G PORT

G02

G 1/4"(Metric)

N02

NPT 1/4"(U.S. Units)

Y

SELECTION FOR P PORT CONTROL

17A3

CAVITY ONLY(WITHOUT VALVE)

PD0A

PD17A30AL (160LPM , 50-210bar)

Z

BODY MATERIAL

A

HIGH-STRENGTH ALUMINUM

Please refer to the list price of cartridge program.