



ISO 08 SANDWICH MANIFOLD

Ordering Code: **MH08RAH-X-Y-Z 03**

Stack Height : 87.3mm

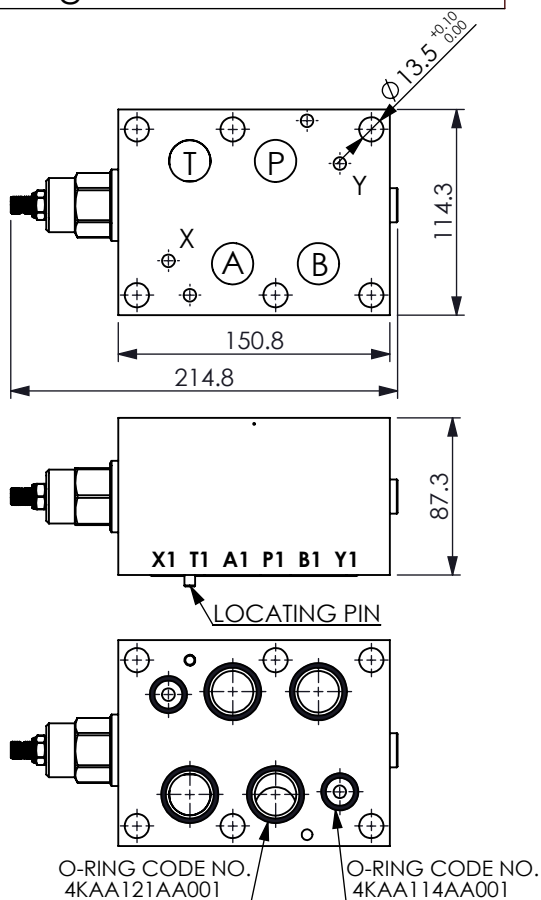

UNIT:mm

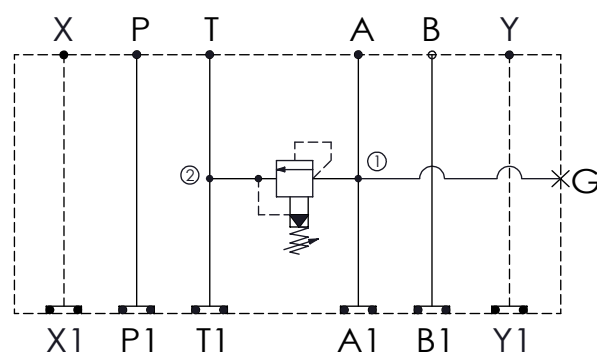

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 240 l/min

Cartridge Valve:
Refer to RP16A-X-Y-Z
* Refer to Winner Cartridge Valve Catalog.

Aluminum	3.2 kg(WITHOUT VALVE)
	3.73 kg(INCLUDE VALVE)
Ductile Iron	9.34 kg(WITHOUT VALVE)
	9.87 kg(INCLUDE VALVE)

* If you need the special specification.
Please contact us.

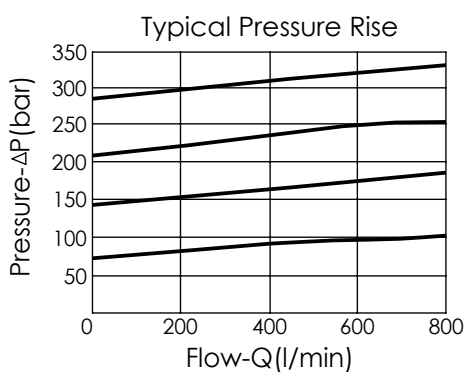

X SELECTION FOR A PORT CONTROL

16A2	CAVITY ONLY(WITHOUT VALVE)
RP0A	RP16A20AL (380 LPM , 7-210bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR G PORT

G02	G 1/4"(Metric)
N02	NPT 1/4"(U.S. Units)

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON