
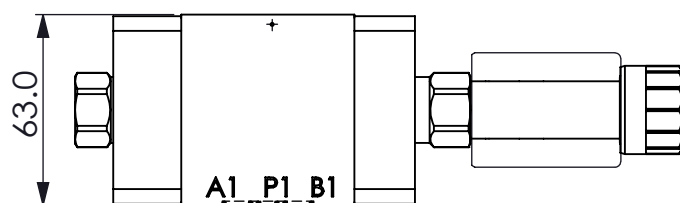


Ordering Code: **MK03ERX-X-Y-A03-Z**

Stack Height : 63.0mm

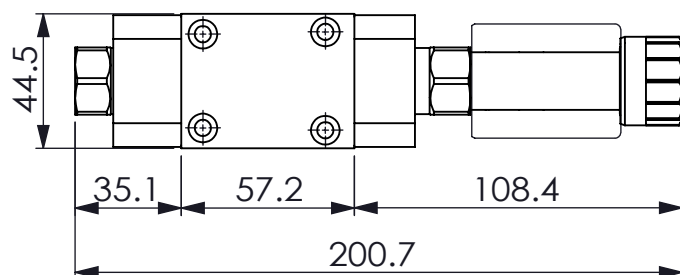


O-RING CODE NO.
4KAA012AA001

UNIT:mm



Typical Metering Performance (①→②)
ΔP=14 bar

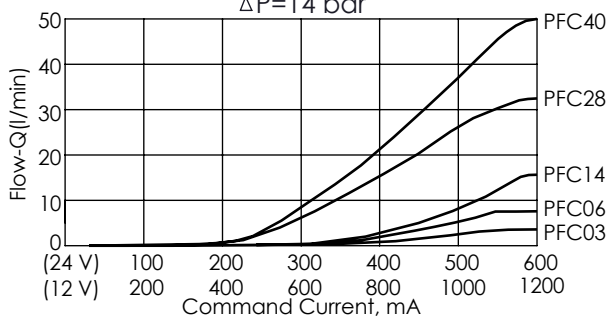


If you need more information
Please contact our sales department

Y

SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC13A-X-Y-Z)

13A2	CAVITY ONLY(WITHOUT VALVE)
PFC03	PFC13A2D0030N(0.3~3LPM)
PFC06	PFC13A2D0060N(0.4~6LPM)
PFC14	PFC13A2D0140N(0.6~14LPM)
PFC28	PFC13A2D0280N(0.8~28LPM)
PFC40	PFC13A2D0400N(1.0~40LPM)

COIL MUST BE ORDERED SEPARATELY
(REFER TO EC-19A-X-Y-Z)

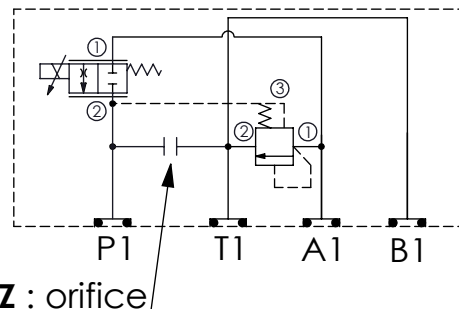

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
Refer to LR11A-X-Y-Z
PFC13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	--

* If you need the special specification.
Please contact us.

X

SELECTION FOR COMPENSATOR

11A3	CAVITY ONLY(WITHOUT VALVE)
LR140	LR11A30140N(60LPM,14.0bar)

Please refer to the list price of cartridge program.

Z

ORIFICE DIAMETER (mm)

	without orifice	
05	ø 0.5 mm (M5xP0.8 Plug)	
07	ø 0.7 mm (M5xP0.8 Plug)	