



## **ISO 03 COVER MANIFOLD**

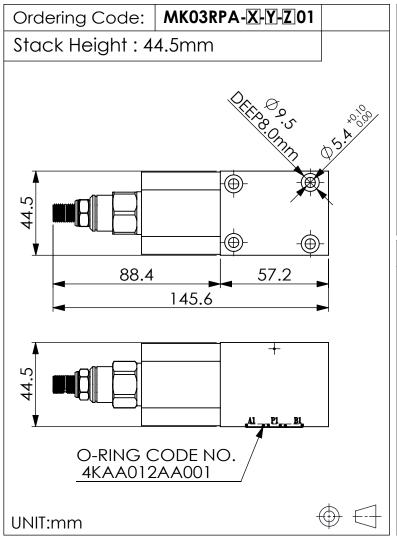



## TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 I/min


## Cartridge Valve:

Refer to RV21A-X-Y-Z

\* Refer to Winner Cartridge Valve Catalog.

| Aluminum | 0.41 kg(WITHOUT VALVE)<br>0.61 kg(INCLUDE VALVE) |
|----------|--|
|          |  |

\* If you need the special specification. Please contact us.

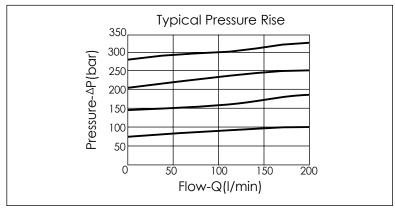

| X  | SELECTION FOR A PORT CONTROL   |  |
|--|--------------------------------|--|
| 21A4   | CAVITY ONLY (WITHOUT VALVE)    |  |
| RVOA   | RV21A40AL (60LPM , 7-210bar)   |  |
| RVOB   | RV21A40BL (60LPM , 3.5-105bar) |  |
|  |                                |  |
|  |                                |  |
| Please refer to the list price of cartridge program. |                                |  |

| Y | SELECTION FOR B PORT CONTROL |  |
|---|------------------------------|--|
| N | WITHOUT PORT                 |  |
|   |                              |  |
|   |                              |  |
|   |                              |  |
|   |                              |  |
|   |                              |  |
|   |                              |  |

| Z | BODY MATERIAL          |  |
|---|------------------------|--|
| Α | HIGH-STRENGTH ALUMINUM |  |
|   |                        |  |
|   |                        |  |
|   |                        |  |
|   |                        |  |
|   |                        |  |

Rev.230810 M.RPA.301