


Ordering Code: **MK03RPW-X-Y-Z01**


Stack Height : 44.5mm




UNIT:mm

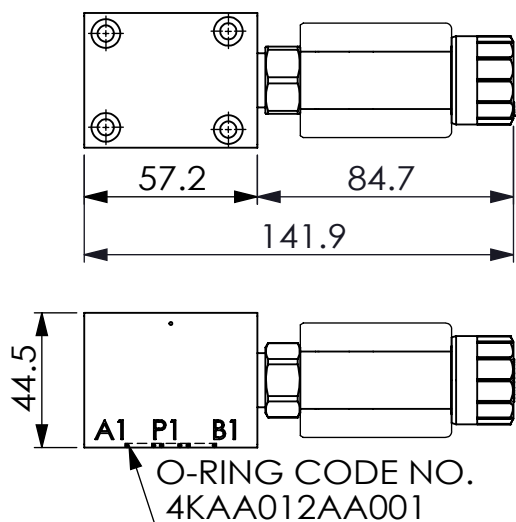

Constant Command
Varying Flow

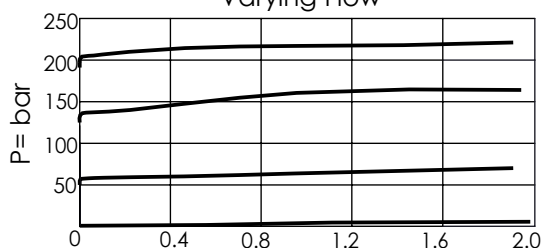

Pressure v.s Command
Flow 0.37 LPM

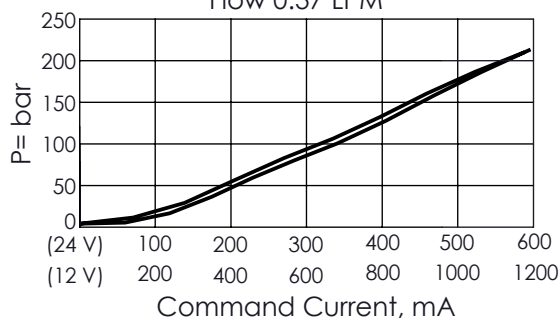

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 1 l/min

Cartridge Valve:
Refer to PRB8A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.28 kg(WITHOUT VALVES) 0.44 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	---

* If you need the special specification.
Please contact us.

X SELECTION FOR A PORT CONTROL

N WITHOUT PORT

Y SELECTION FOR ELECTRO-PROPORTIONAL PILOT RELIEF (PORT ① TO ②, NEAR "B" PORT SIDE)

8A2 CAVITY ONLY(WITHOUT VALVE)

PRBDA PRB8A2DAN(1LPM,20~210bar)

COIL MUST BE ORDERED SEPARATELY
(REFER TO EC-19A-X-Y-Z)

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM