

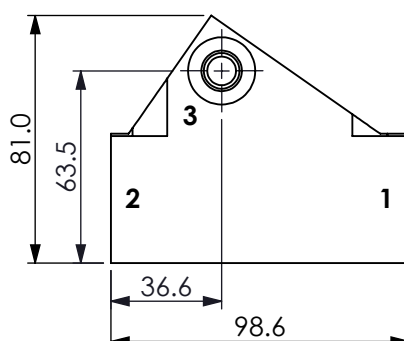
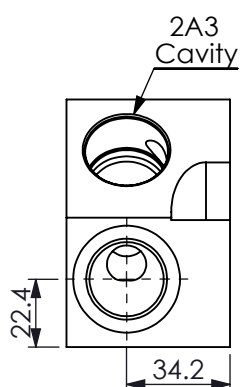


Ordering Code: **ML-2A3-X-Y 42-Z**

Mounting Holes:
 $\varnothing 8.7\text{mm}$. diameter
 through hole.
 2 places.

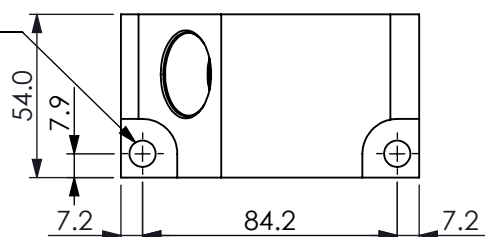

UNIT:mm

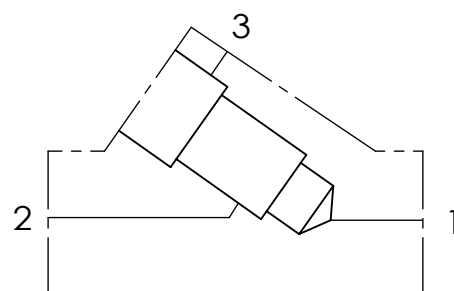

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron
 Body Pressure Rating: 350 bar

Cavity:

Refer to 2A3

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.67 kg(WITHOUT VALVES)
Ductile Iron	1.96 kg(WITHOUT VALVES)

* If you need the special specification.
 Please contact us.

PORT SIZE

X	PORTS	PORT	
	1,2	3	
G06A	G 3/4"	G 1/4"	

Y BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON

Z CARTRIDGE VALVES SELECTION

WITHOUT VALVE