
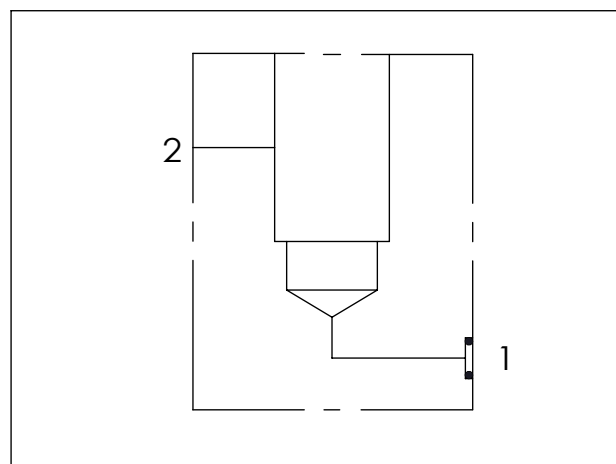


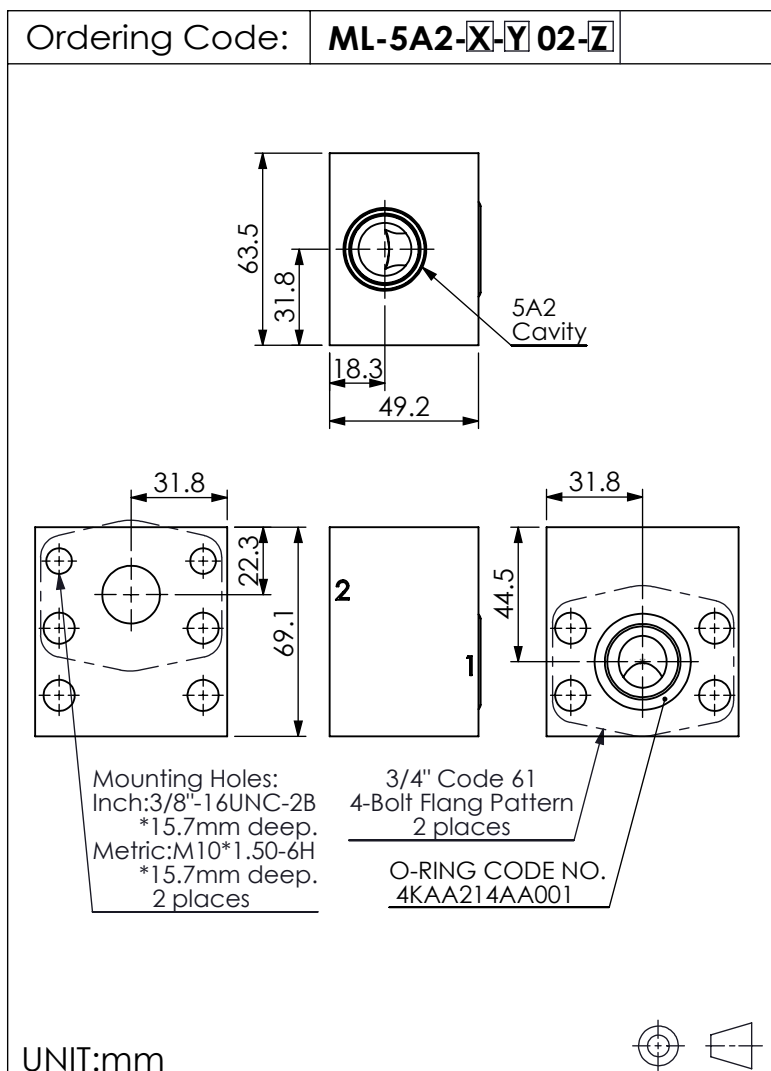

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Cavity:

Refer to 5A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.5 kg(WITHOUT VALVES)

* If you need the special specification. Please contact us.

X	PORT SIZE			
	PORT	PORT	MOUNTING DIMENSIONS	
	1	2		
F61M06	3/4" Code 61 (5000 psi) 4-Bolt Flang Pattern	3/4" Code 61 (5000 psi) 4-Bolt Flang Pattern	Metric	M10 x 1.50-6H
F61E06	3/4" Code 61 (5000 psi) 4-Bolt Flang Pattern	3/4" Code 61 (5000 psi) 4-Bolt Flang Pattern	Inch	3/8"-16 UNC-2B

Y	BODY MATERIAL		Z	CARTRIDGE VALVES SELECTION
A	HIGH-STRENGTH ALUMINUM			WITHOUT VALVE
			CV2003	CV5A2003N(160LPM,0.3bar)
			FR0A	FR5A20AL(45LPM,350bar)
			NV33	NV5A2033L(350bar)
			Please refer to the list price of cartridge program.	