



Ordering Code: **ML-19A3-X-Y 03-Z**

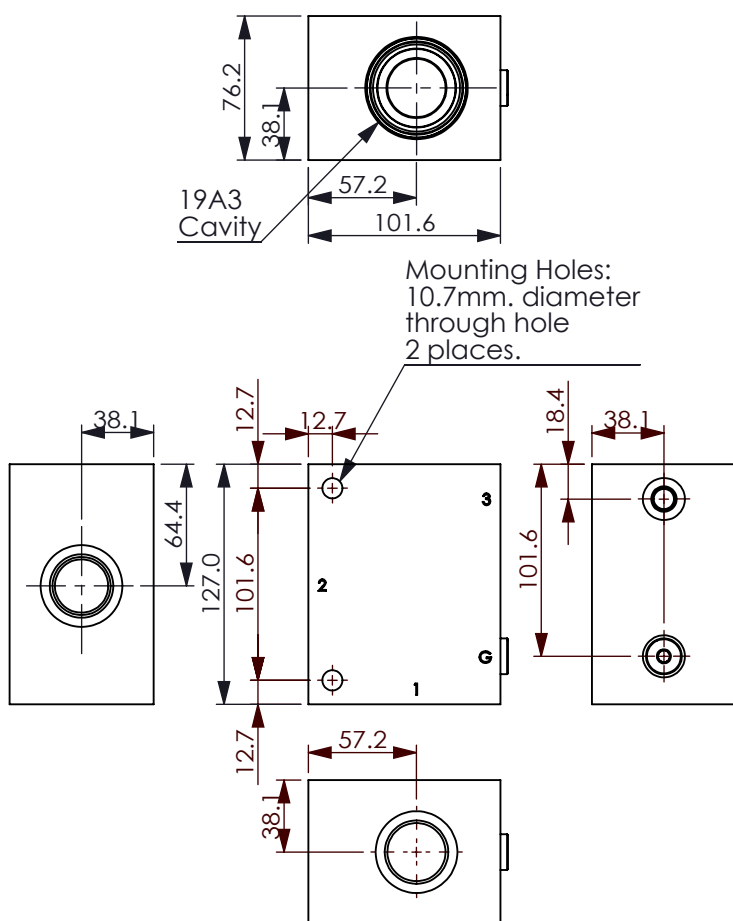

UNIT:mm

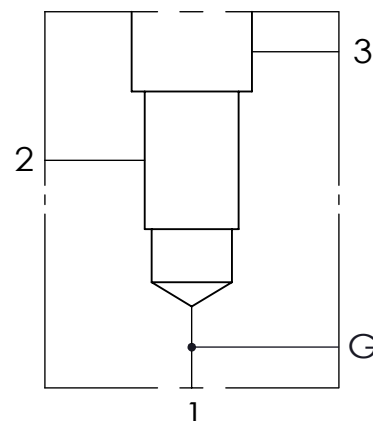

### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Cavity:

Refer to 19A3

\* Refer to Winner Cartridge Valve Catalog.

Aluminum	2.05 kg(WITHOUT VALVES)
Steel	5.65 kg(WITHOUT VALVES)

\* If you need the special specification.  
Please contact us.

### PORT SIZE

X	PORTS	PORT	PORT	
	1,2	3	G	
<b>G08AG</b>	G 1"	G 1/4"	G 1/4"	
<b>S16AG</b>	SAE 16	SAE 6	1/4"NPT	
<b>S20AG</b>	SAE 20	SAE 6	1/4"NPT	

### Y BODY MATERIAL

**A** HIGH-STRENGTH ALUMINUM

**T** STEEL (black oxide)

### Z CARTRIDGE VALVES SELECTION

WITHOUT VALVE

**RV0A** RV19A30AL (480LPM,7-210bar)

**CBCH** CB19A3CHL (3:1,70-280bar)

**CO20** CO19A3020N (480LPM,2.0bar)

**CC20** CC19A3020N (640LPM,2.0bar)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)