
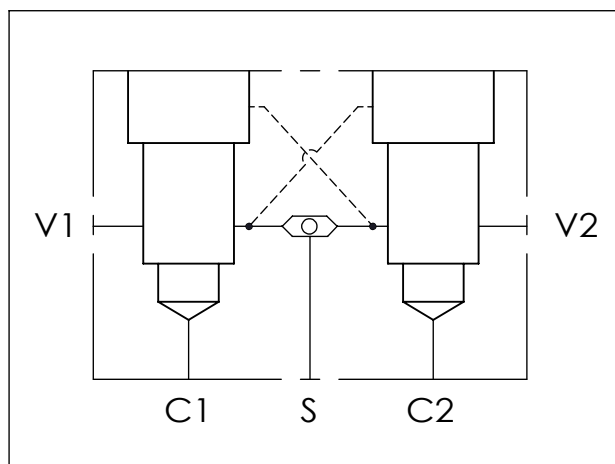


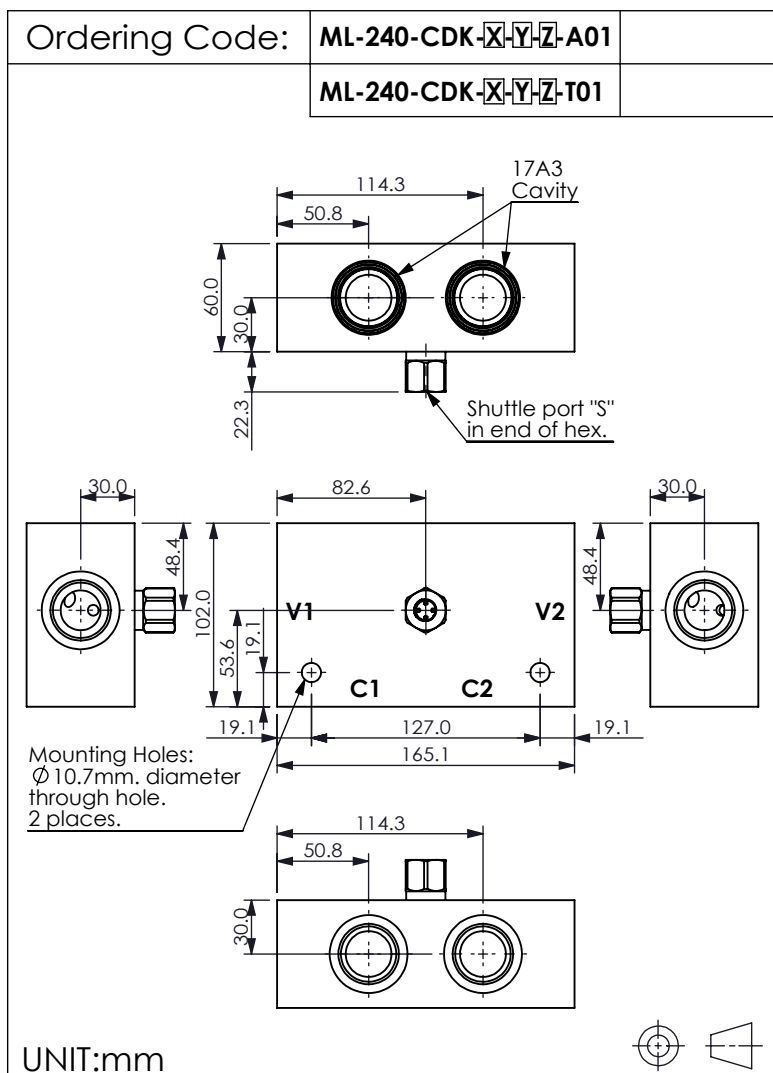

### TECHNICAL DATA

|                       |         |
|-----------------------|---------|
| Aluminum (A01)        | 210 bar |
| Body Pressure Rating: |         |
| Steel (T01)           | 350 bar |
| Body Pressure Rating: |         |

Cavity: Refer to 17A3

Shuttle valve:

Refer to LS13A20NG02

\* Refer to Winner Cartridge Valves Catalog.



|              |                                                             |
|--------------|-------------------------------------------------------------|
| Aluminum     | 2.12 kg (WITHOUT CONTERBALAN VALVE)<br>(WITH SHUTTLE VALVE) |
| DUCTILE IRON | 6.02 kg (WITHOUT CONTERBALAN VALVE)<br>(WITH SHUTTLE VALVE) |

\* If you need the special specification.  
Please contact us.

| Z          | PORT SIZE      |                |           |  |
|------------|----------------|----------------|-----------|--|
|            | PORTS<br>V1,V2 | PORTS<br>C1,C2 | PORT<br>S |  |
| <b>G08</b> | G 1"           | G 1"           | G 1/4"    |  |
| <b>G10</b> | G 1-1/4"       | G 1-1/4"       | G 1/4"    |  |
|            |                |                |           |  |
|            |                |                |           |  |
|            |                |                |           |  |
|            |                |                |           |  |

| X           | SELECTION FOR V1 PORT CONTROL |
|-------------|-------------------------------|
| <b>17A3</b> | CAVITY ONLY (WITHOUT VALVE)   |
| <b>CBCH</b> | CB17A3CHL (3:1 , 280bar)      |
| <b>CO20</b> | CO17A3020N (2.0bar)           |
| Y           | SELECTION FOR V2 PORT CONTROL |
| <b>17A3</b> | CAVITY ONLY (WITHOUT VALVE)   |
| <b>CBCH</b> | CB17A3CHL (3:1 , 280bar)      |
| <b>CO20</b> | CO17A3020N (2.0bar)           |

### HYDRAULIC CIRCUITS (WITH VALVES)

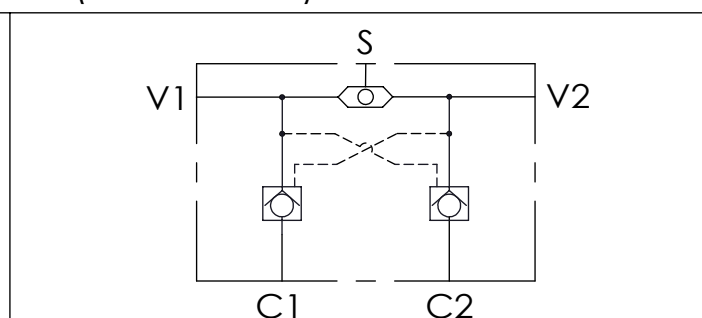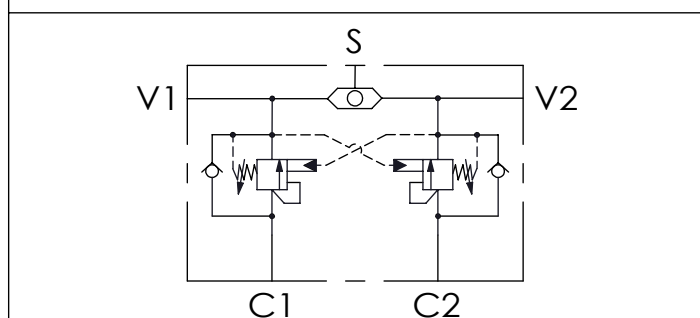

Ordering Code: **ML-240-CDK-CBCH-CBCH-Z-A01**

Ordering Code: **ML-240-CDK-CO20-CO20-Z-A01**