

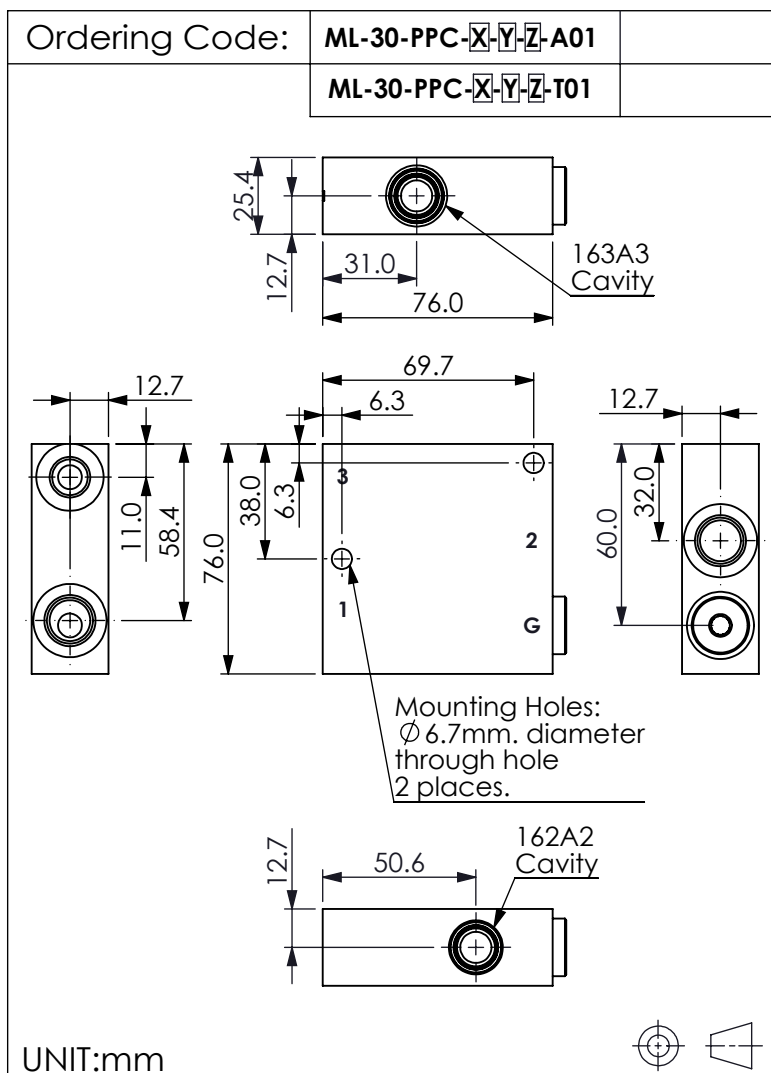


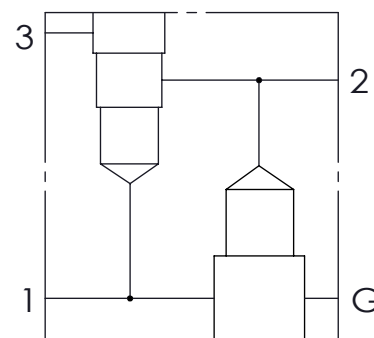

TYPICAL CIRCUIT:

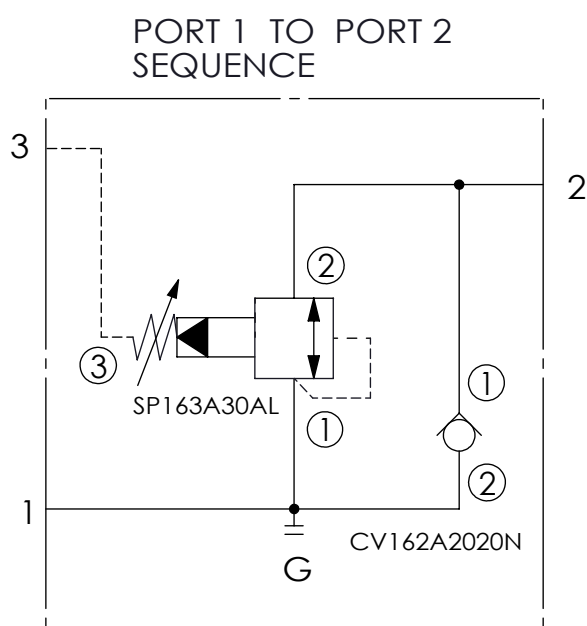

TECHNICAL DATA

Aluminum (A01)	210 bar
Body Pressure Rating:	
Steel (T01)	350 bar
Body Pressure Rating:	

Cavity: Refer to 163A3 162A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.32 kg(WITHOUT VALVES)
Steel	0.9 kg(WITHOUT VALVES)

* If you need the special specification.
Please contact us.

X CARTRIDGE VALVES SELECTION

163A3	CAVITY ONLY(WITHOUT VALVE)
SP0A	SP163A30AL (30LPM , 5-210bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR SOLENOID VALVES (REFER TO CV162A-X-Y-Z)

162A2	CAVITY ONLY(WITHOUT VALVE)
CV2020	CV162A2020N(40LPM,2.0bar)

Please refer to the list price of cartridge program.

Z PORT SIZE

Z	PORTS	PORT	PORT	
	1,2	3	G	
G03AG	G 3/8"	G 1/4"	G 1/4"	