




## **SOLENOID OPERATED VALVE**

(Pilot Operated)

(Poppet 2-Way Normally-Closed Cartridge Style)

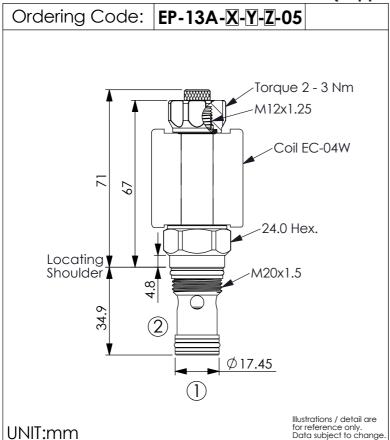


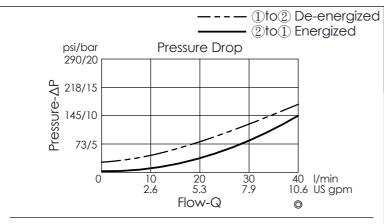



The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

Y	OPERATION	
05	Normally-Closed Reverse Flow Energized	



TECHNICA	L DATA	
Max.Operating pres	ssure: 350	bar
Rated flow:	40	l/min
Cavity-Tooling:	13A-2	
Installation torque:	39 - 51	Nm
Weight:	0.141 ( <b>Z</b> =1	1) kg

Internal Leakage Approximately: 0.15 cc/minute (3 drops/minute) max. at 350 bar

Hydraulic Fluid Viscosity Cleanliness Temperature Level: Please refer WINNER technical information.
(T.101.101.E HYDRAULIC FLUID (A)VISCOSITY)
(T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS)
(T.101.103.E HYDRAULIC FLUID (C)

Minimum Voltage Required: 90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE	
2A	2 Ports · 20 Watt. Coil Ø 12.7 mm tube	

Z	OPTIONS
N	Non-adjustable
M	Screw-out Knob Style

Rev.250102 D.105.401.E