



SOLENOID OPERATED VALVE

(Direct-Acting)

(Normally-Closed Double-Lock Cartridge Style With Filter)

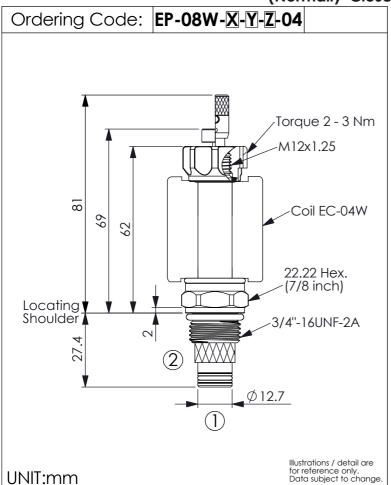


 1)to(2) Energized ②to① Energized psi/bar Pressure Drop 290/20 Pressure-ΔP 218/15 145/10 73/5 0 I/min 0.8 2.4 4.0 ÚS gpm Flow-Q

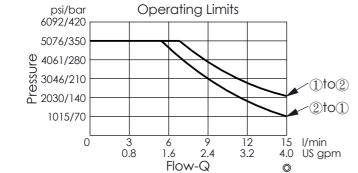

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.

Y	OPERATION	
57	Direct-Acting Normally-Closed Double-Lock With Filter	



TECHNIC	ALDAIA	
Max. Operating pre	essure: 350	bar
(Refer To	Performance	Chart)
Rated flow:	10	I/min
(Refer To	Performance	Chart)
Response Time:	40 - 60	ms
Cavity-Tooling:	08W-2	
Installation torque:	39 - 51	Nm
Weight:	0.105 (Z =N)	kg

0.15 cc/minute
(3 drops/minute) max. at 250 bar

Filter Standard: \emptyset 0.3mm (50 mesh) (If you need more finer mesh filter, please feel free to contact us.)

Hydraulic Fluid Viscosity · Cleanliness · Temperature Level: Please refer WINNER technical information. (T.101.101.E HYDRAULIC FLUID (A)VISCOSITY) (T.101.102.E HYDRAULIC FLUID (B)CLEANLINESS) (T.101.103.E HYDRAULIC FLUID (C)TEMPERATURE)

Minimum Voltage Required: 90 % of nominal

Coils must be ordered separately

Mounting Position: unrestricted

X	STRUCTURE	
2A	2 Ports \cdot 20 Watt. Coil \emptyset 12.7 mm tube	

Z	OPTIONS
N	Non-adjustable
Р	Push Style Manual Override
Т	Push and Twist Style Manual Override (For emergency or test use only. Please keep at the normal operational position after turning counterclockwise.) (A larger force is required for downward push during high-pressure operations, please contact Winner's sales department.)